



WALRUS
PUMP

TPMK Series

Immersible Pump

IE3 
Motor



**Better Life
Through Innovation**

Content

General Data	03
Performance Range	04
Sectional Drawing	05
Performance Curves/Technical Data	
TPMK 1T	06
TPMK 3T	08
TPMK 5T	10

TPMK Series Immersible Pump

50 Hz

Power: 1.1 - 3.0 kW
Head: Up to 130 M
Flow: Up to 150 L/min
Outlet: ¾" - 1"

60 Hz

Power: 1.1 - 3.7 kW
Head: Up to 140 M
Flow: Up to 160 L/min
Outlet: ¾" - 1"



Construction Industry



Agriculture & Fishing Industry



Manufacturing Industry



Electricity & New Energy Industry



Entertainment & Leisure Industry



Accommodation & Food Service Industry



Wholesale & Retail Industry



Water Supply & Pollution Control



Service Industry

Product Features

- Submersible vertical centrifugal pump, self-priming, co-axial pump-motor design, impellers mounted on extended motor shaft. Main working parts made by stainless steel.

Applications

The TPMK is vertical multistage centrifugal pump, designed for industrial use, specially for machine tool. It is suitable to carry fluids such as water, coolant, light oil and other clean, non aggressive matters:

- Industrial circulation system
- Washing/cleaning system
- Filtration system

Motor


- Enclosure class: IP54
- Insulation class: F.
- Frequency range: 50/60 Hz
- Nominal speed: 2900/3500 rpm
- Voltages Code:

Code	PH	50Hz	60Hz
A6V	3	200-230/342-415V	220-240/380-480V
A9V	3	200-230/342-380V	220-240/380-440V

Operating Conditions


- Liquid temperature: +0°C ~ +90°C
- Ambient temperature: Max. +40°C
- Operating pressure: Max. 15 kg/cm²
- Submerged depth: Min. 40 mm

Model Code




Model name	TPMK	5T	9	-	9	S	K
Standard capacity (m ³ /h)							
Number of Stages							
Number of Impellers							
Stainless steel series							
With coupling							


Performance Curve, 50Hz

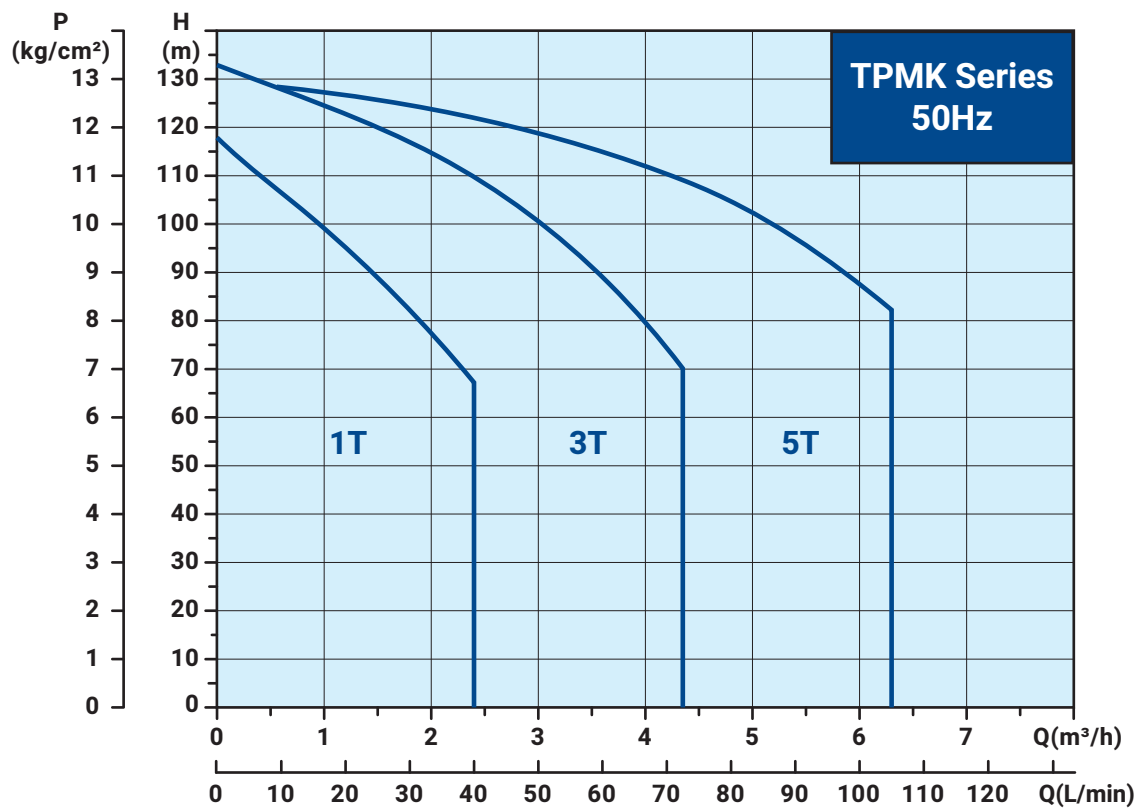

Performance Curve, 60Hz

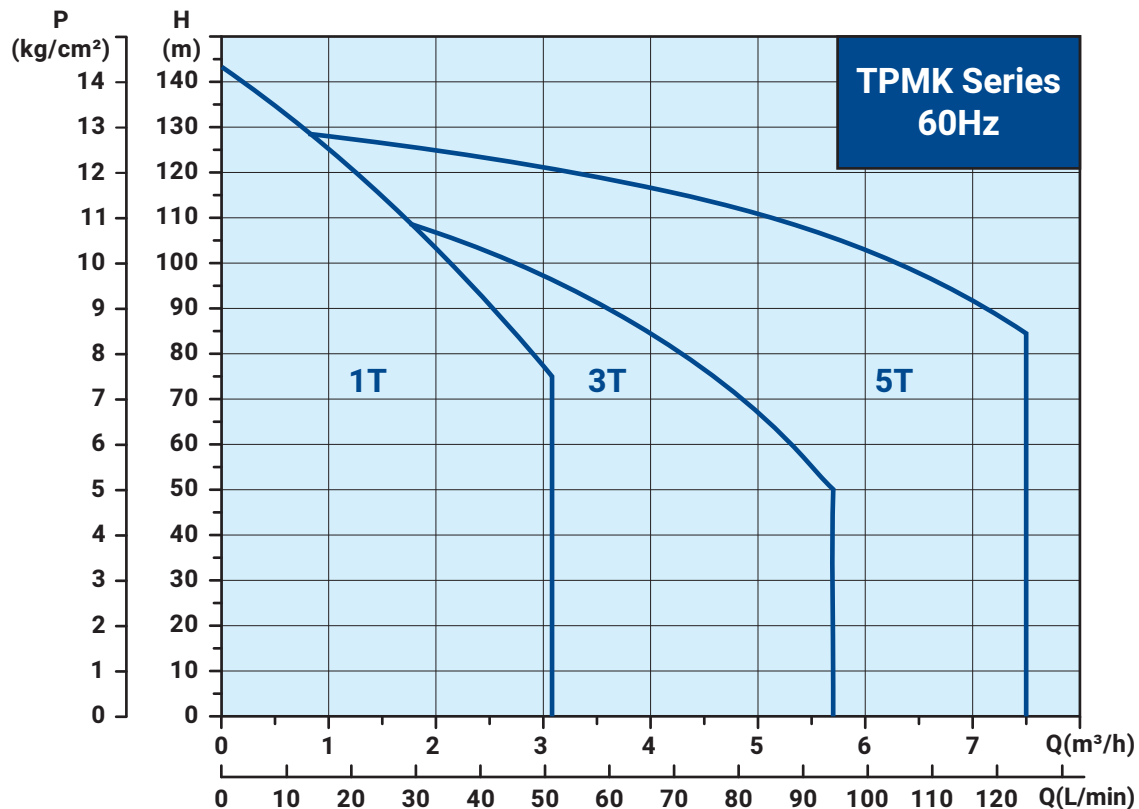

Sectional Drawing

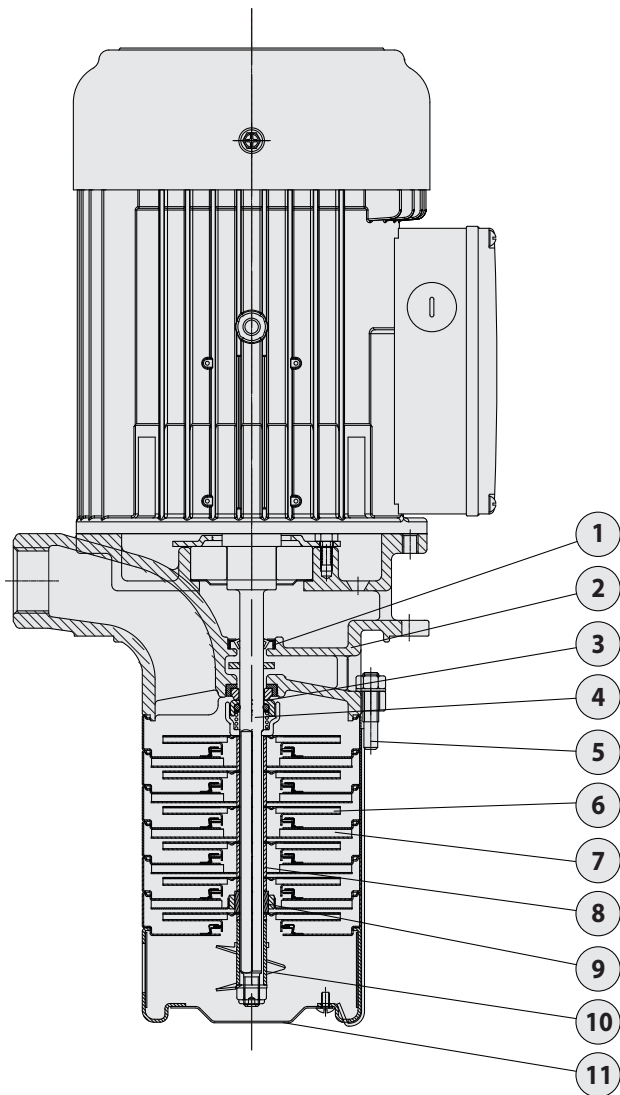

Materials

NO.	Part Name	Material	
		Standard	S series
1	Oil seal	NBR	
2	Pump Casing	FC20	SUS 304
3	Mechanical Seal	MSSH / MGSB	
4	Shaft	SUS 304	
5	Strap	SUS 304	
6	Impeller	SUS 304	
7	Intermediate Chamber	SUS 304	
8	Sleeve	SUS 304	
9	Bearing	SiC	
10	Priming screw	SUS 304	
11	Filter	SUS 304	

Options on Request

Mechanical seal type	Material	
	Stationary Face/ Rotary Face	Cup Gasket & O Ring
MGSB	(G)Carbon/ (S)Silicium carbide	(H) HNBR (V) Viton (E) EPDM
MSSH	(S)Silicium carbide/ (S)Silicium carbide	
MSSV		
MSSE		

Electrical Data, 50Hz


Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output Power kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPMK 1T10-10(S)	3	56V	50	200-230/342-415	1.1	5.2-5.4/3.1-3.4	1.1	5.5-5.7/3.3-3.5
TPMK 1T12-12(S)	3	56V	50	200-230/342-415	1.1	5.2-5.4/3.1-3.4	1.1	5.5-5.7/3.3-3.5
TPMK 1T14-14(S)	3	56V	50	200-230/342-415	1.1	5.2-5.4/3.1-3.4	1.1	5.5-5.7/3.3-3.5

Electrical Data, 50/60Hz


Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output Power kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPMK 1T10-10(S)	3	A9V	50 60	200-230/342-380 220-240/380-440	1.5	6.3-6.1/3.6-3.5 5.8-5.5/3.4-3.1	1.1 1.5	6.8-6.5/3.9-3.7 8.3-7.6/4.8-4.2
TPMK 1T12-12(S)	3	A9V	50 60	200-230/342-380 220-240/380-440	1.5	6.3-6.1/3.6-3.5 5.8-5.5/3.4-3.1	1.1 1.5	6.8-6.5/3.9-3.7 8.3-7.6/4.8-4.2
TPMK 1T12-12SK	3	A9V	50 60	200-230/342-380 220-240/380-440	1.5	6.3-6.1/3.6-3.5 5.8-5.5/3.4-3.1	1.1 1.5	6.8-6.5/3.9-3.7 8.3-7.6/4.8-4.2

Dimensions

Model	Cycle Hz	L mm	A mm	B mm	C mm	D mm	E mm	N.W. kg	
TPMK 1T10-10(S)	50	554	284	270	232	111	145	17.6	15
TPMK 1T12-12(S)	50	590	284	306	232	111	145	18.1	15
TPMK 1T14-14(S)	50	626	284	342	232	111	145	18.6	15
TPMK 1T10-10(S)	50/60	569	299	270	244	123	181	18.4	15
TPMK 1T12-12(S)	50/60	605	299	306	244	123	181	18.9	15

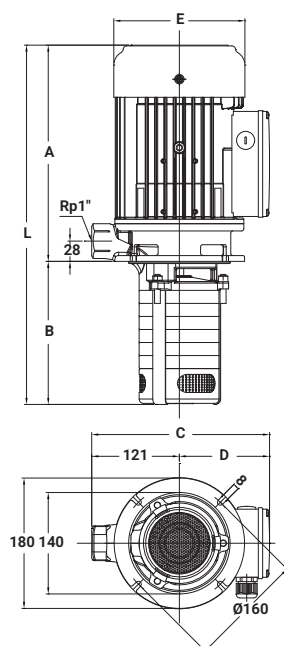


TPMK1T

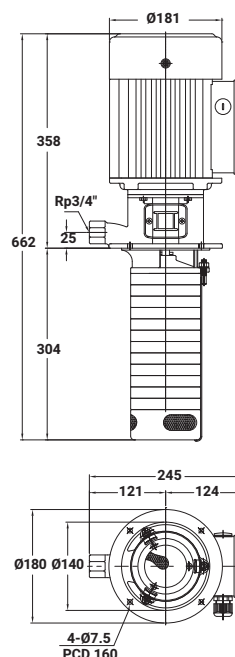


TPMK1T12-12SK

Performance Curve, 50Hz

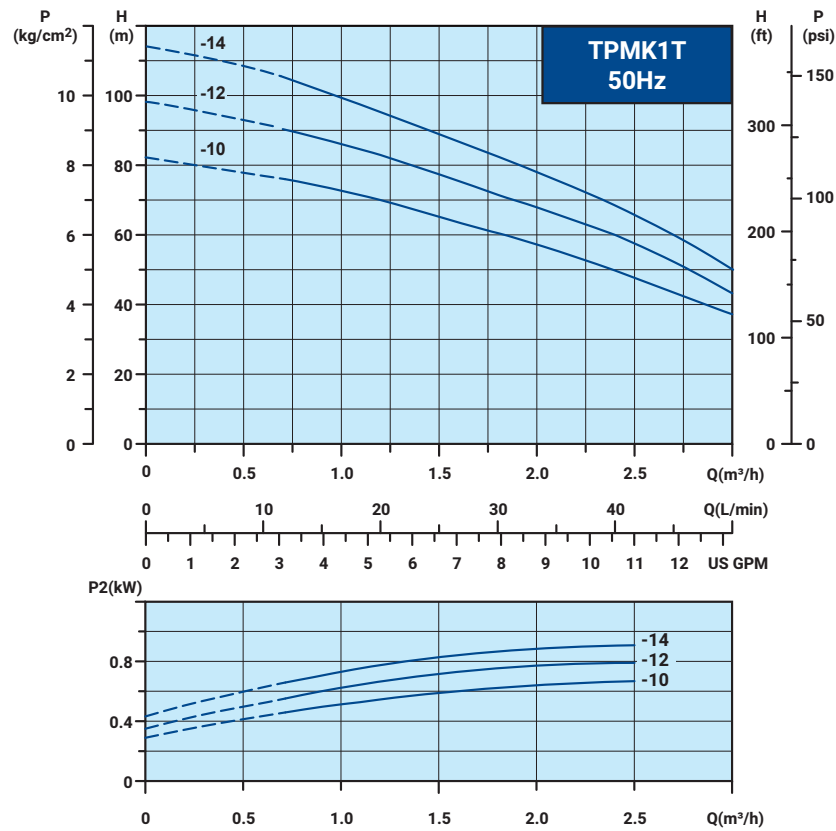

Performance Curve, 60Hz

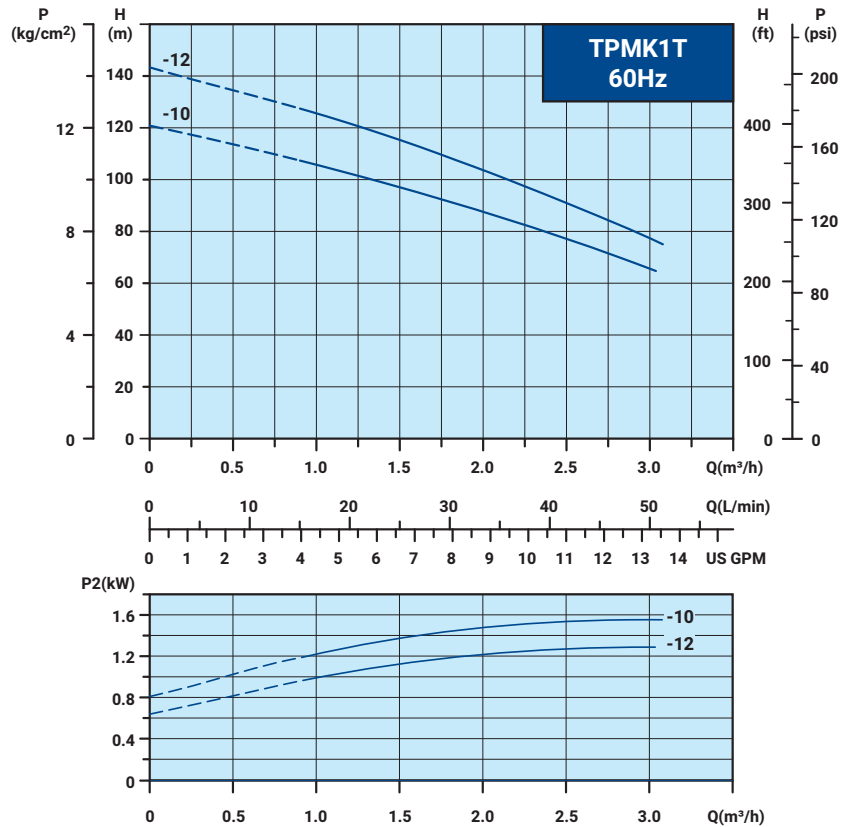


Electrical Data, 50Hz

Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output Power kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPMK 3T9-9(S)	3	56V	50	200-230/342-415	1.1	5.2-5.4/3.1-3.4	1.1	5.5-5.7/3.3-3.5
TPMK 3T12-12(S)	3	59V	50	200-230/342-380	1.5	6.3-6.1/3.6-3.5	1.1	6.8-6.5/3.9-3.7
TPMK 3T14-14(S)	3	59V	50	200-230/342-380	2.2	9.5-10.5/5.5-5.6	1.1	10.2-10.9/5.9-5.9

Electrical Data, 50/60Hz

Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output Power kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPMK 3T9-9(S)	3	A9V	50 60	200-230/342-380 220-240/380-440	2.2	9.5-10.5/5.5-5.6 8.6-8.4/4.9-5.0	1.1 1.5	10.2-10.9/5.9-5.9 12.1-11.2/6.9-6.4


Dimensions

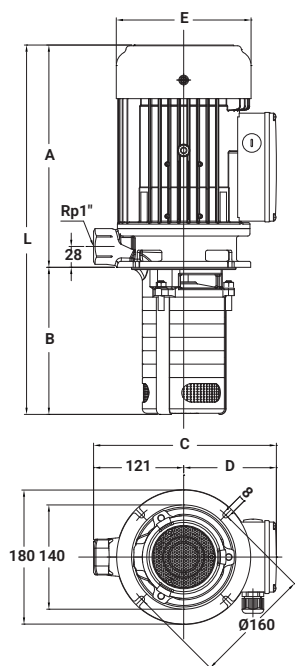


Model	Cycle Hz	L mm	A mm	B mm	C mm	D mm	E mm	N.W. kg	
TPMK 3T9-9(S)	50	536	284	252	232	111	145	17.3	15
TPMK 3T12-12(S)	50	605	299	306	244	123	181	18.8	15
TPMK 3T14-14(S)	50	663	321	342	244	123	181	22.1	15

Model	Cycle Hz	L mm	A mm	B mm	C mm	D mm	E mm	N.W. kg	
TPMK 3T9-9(S)	50 60	573	321	252	244	123	181	20.9	15

Performance Curve, 50Hz

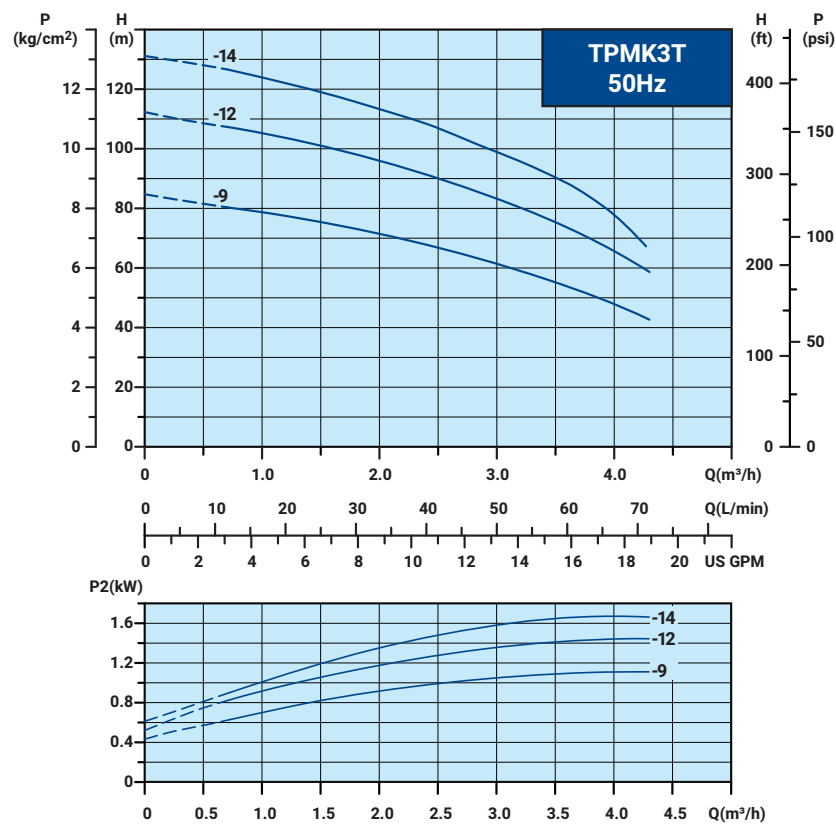

Performance Curve, 60Hz

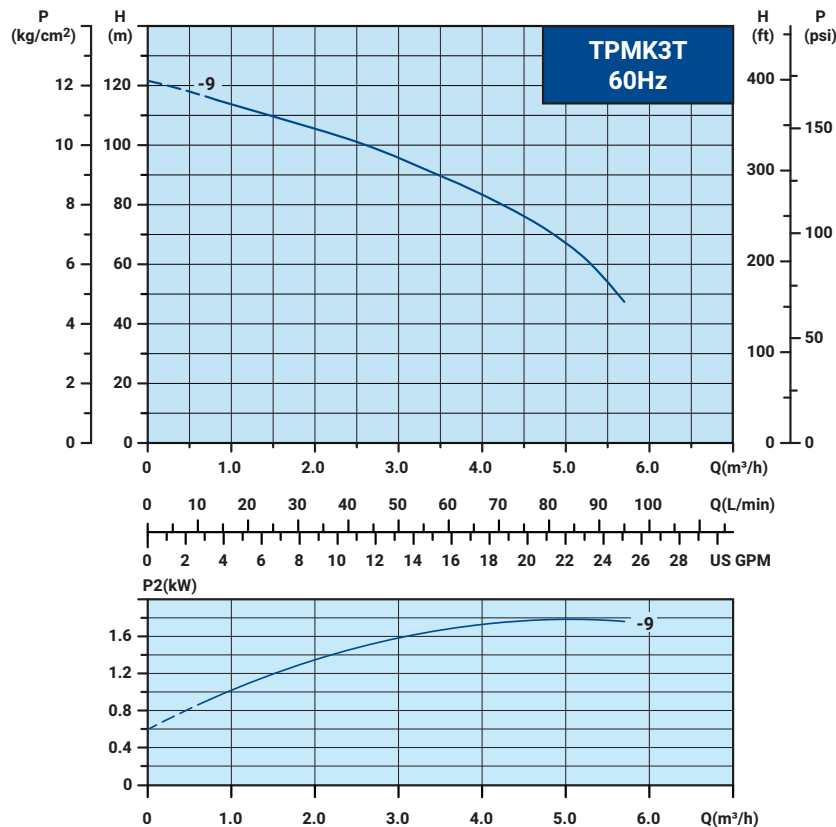


Electrical Data, 50Hz

Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output Power kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPMK 5T7-7(S)	3	59V	50	200-230/342-380	1.5	6.3-6.1/3.6-3.5	1.1	6.8-6.5/3.9-3.7
TPMK 5T9-9(S)	3	59V	50	200-230/342-380	2.2	9.5-10.5/5.5-5.6	1.1	10.2-10.9/5.9-5.9
TPMK 5T11-11(S)	3	59V	50	200-230/342-380	3.0	12.2-13.1/7.1-7.7	1.1	13.4-14.0/7.9-7.8
TPMK 5T13-13(S)	3	59V	50	200-230/342-380	3.0	12.2-13.1/7.1-7.7	1.1	13.4-14.0/7.9-7.8

Electrical Data, 50/60Hz

Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output Power kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPMK 5T7-7(S)	3	A9V	50 60	200-230/342-380 220-240/380-440	3.0	12.2-13.1/7.1-7.7 11.2-10.7/6.4-6.3	1.10 1.30	13.4-14.0/7.9-7.8 14.5-13.3/8.3-7.6
TPMK 5T9-9(S)	3	A9V	50 60	200-230/342-380 220-240/380-440	3.4 3.7	13.4-13.0/7.8-7.4 13.4-12.6/7.7-7.0	1.10 1.25	14.6-13.9/8.5-8.0 16.4-15.1/9.4-8.4


Dimensions

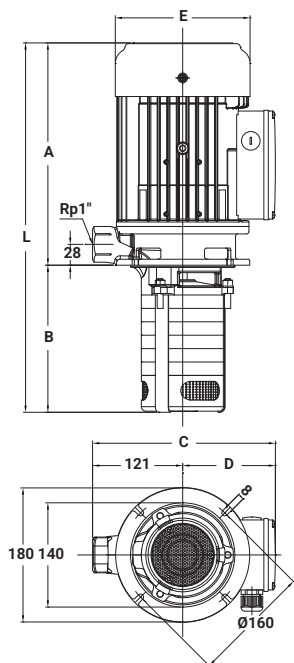


Model	Cycle Hz	L mm	A mm	B mm	C mm	D mm	E mm	N.W. kg	
TPMK 5T7-7(S)	50	515	299	216	244	123	181	17.6	15
TPMK 5T9-9(S)	50	573	321	252	244	123	181	20.9	15
TPMK 5T11-11(S)	50	634	346	288	244	123	181	24.6	15
TPMK 5T13-13(S)	50	670	346	324	244	123	181	25.1	15

Model	Cycle Hz	L mm	A mm	B mm	C mm	D mm	E mm	N.W. kg	
TPMK 5T7-7(S)	50 60	562	346	216	244	123	181	23.9	15
TPMK 5T9-9(S)	50 60	618	366	252	244	123	181	25.8	15

Performance Curve, 50Hz

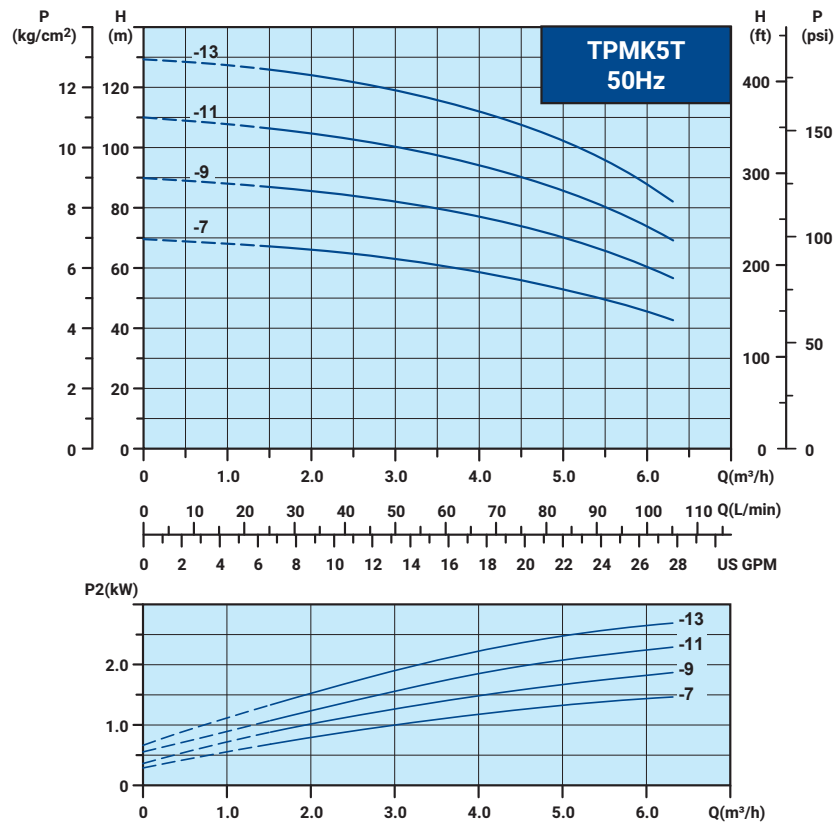

Performance Curve, 60Hz

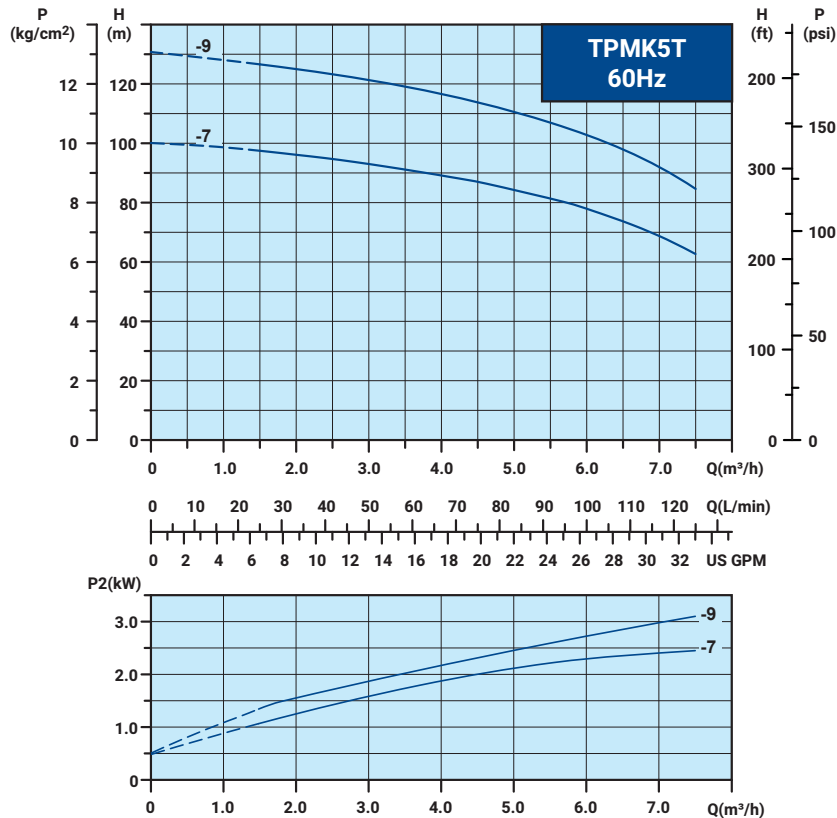



WALRUS
PUMP

WALRUS PUMP CO., LTD.

Head office: No.83-14, Dapiantou, Sanzhi Dist.,

New Taipei City 252, Taiwan

Tel: (+886) 2 2636-1123~7

Fax: (+886) 2 8635-2660

Email : walrus.sales@walrus.com.tw



All specifications are subject to change without notice. TPMK-IE3-EN002a-202308

