

KAB / KABP Pressure-Relief Type Grease Electric Lubricator

PLC




CHEN YING

KAB / KABP Pressure-Relief Type Grease Electric Lubricator




KAB-35-K-3-PC-RC

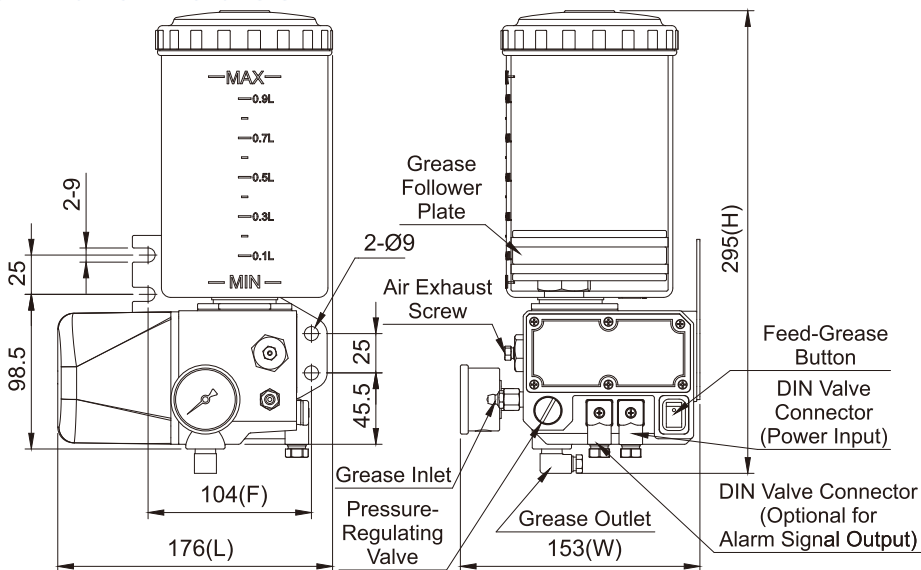

Dimensional Drawing of KAB-35-K-3-PC-RC



KABP-07-K-3-PC-RC

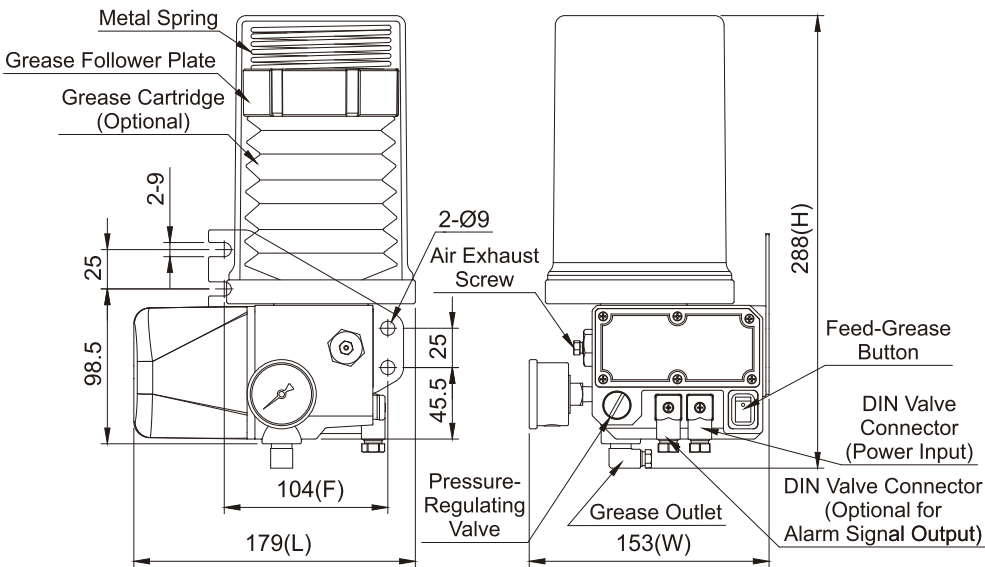

Dimensional Drawing of KABP-07-K-3-PC-RC with Grease Cartridge

◆Features

1. The operation and interval time of KAB and KABP are controlled by PLC.
2. KAB and KABP have to work with CFB volume type grease distributors to deliver the metered quantity of grease to the lubrication points.
3. KAB and KABP have pressure gauges that enable the users to check the operating pressure easily.
4. KAB and KABP have feed-grease buttons, which can be used as manual grease feeding for less than 3 minutes to avoid overloading the motor.
5. A 60kgf/cm² socket pressure switch can be added to KAB and KABP on request to detect the operating pressure automatically.
6. A magnetic level switch can be added to KAB and KABP on request to detect the grease level automatically.
7. For KAB, please refill grease from the grease inlet to prevent air and impurities from going into the grease tank.
8. KABP-07 works with a 700cc disposable grease cartridge. When the grease is empty, replace KABP-07 with a new grease cartridge. Standard KABP-07 does not include a grease cartridge but is available upon request.

◆Dimensional Data (KAB)

Model	Tank Capacity	Length (mm)	Width (mm)	Height (mm)	Fixed Hole Distance (mm)	N.W. (kg)
KAB-40	800cc	172	153	338	104	2.32
KAB-35	1000cc	176	153	295		2.41
KAB-50	2000cc	183	153	379		2.74

◆Dimensional Data (KABP)

Model	Effective Capacity	Length (mm)	Width (mm)	Height (mm)	Fixed Hole Distance (mm)	N.W. (kg)
KABP-07	700cc Grease Cartridge	179	153	288	104	2.49


KAB / KABP Pressure-Relief Type Grease Electric Lubricator

PLC

Technical Data

Motor Power	35±3W
Voltage	DC24V
Ampere	3.0A
Max. Discharge Volume	10cc/min
Max. Operating Pressure	100kgf/cm ²
Discharge Bore	Ø6, Ø8
Magnetic Level Switch	Optional (NC or NO Contact)
Pressure Switch	Optional (NC or NO Contact)
Suitable Viscosity	Grease, NLGI 000-0

Wiring Diagram

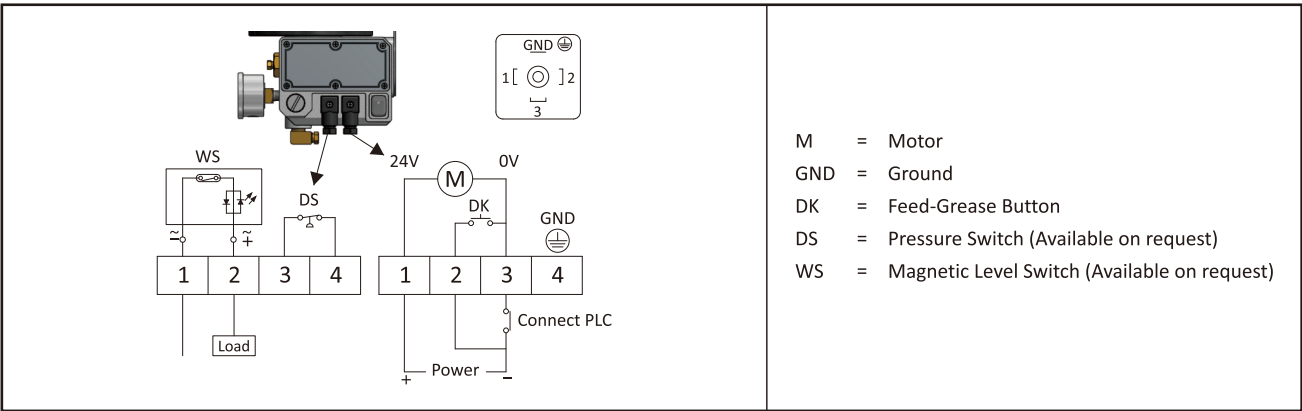

Order Code (KAB)

KAB	35	K	3	※
	Tank Capacity	Voltage	Discharge Bore	Special Request
	40 800cc	K DC24V	1 Ø6	PC Add a NC Contact Pressure Switch
	35 1000cc		3 Ø6 W/Pressure Gauge	PO Add a NO Contact Pressure Switch
	50 2000cc		4 Ø8	RC Add a NC Contact Magnetic Level Switch
			5 Ø8 W/Pressure Gauge	RO Add a NO Contact Magnetic Level Switch

Order Code (KABP)

KABP	07	K	3	※
	Effective Capacity	Voltage	Discharge Bore	Special Request
	07 700cc Grease Cartridge	K DC24V	1 Ø6	PC Add a NC Contact Pressure Switch
			3 Ø6 W/Pressure Gauge	PO Add a NO Contact Pressure Switch
			4 Ø8	RC Add a NC Contact Magnetic Level Switch
			5 Ø8 W/Pressure Gauge	RO Add a NO Contact Magnetic Level Switch

※ Please refer to the 700cc Grease Cartridge catalog if you need to purchase one.

Related Products

