




Patent
No.M417975
No.M419629



IK-618S-LV

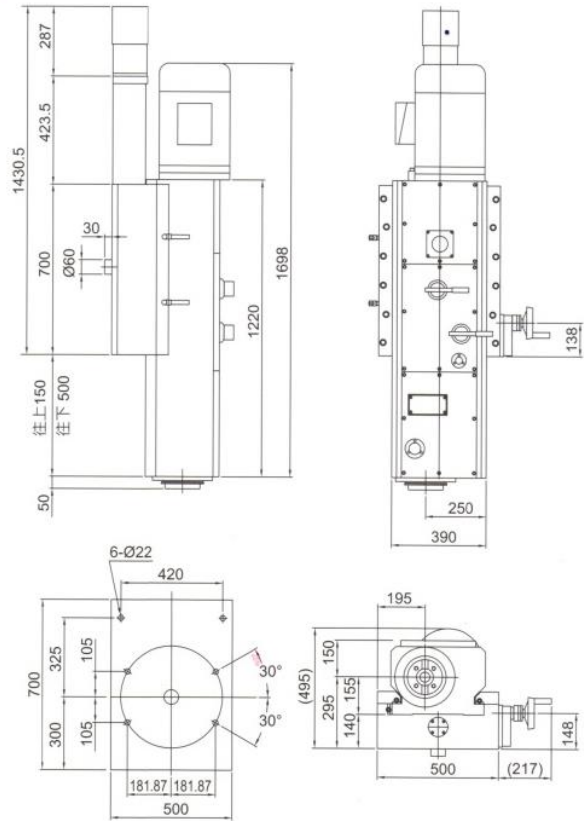



SPECIFICATION

MODEL	Unit	IK-618S-LV	
Spindle			
Spindle Bore Diameter		NT50	
Diameter of Spindle Nose	mm	Φ128.6	
Spindle Motor	Hp	12.5(4P)	15(4P)
Step of Spindle Speed	stage	6	
Spindle Speed (50Hz)	rpm	105	325
		166	450
		217	680
Spindle Speed (60Hz)	rpm	130	390
		200	540
		260	815
Working Range			
Max Diameter of Cutter	mm	200	
Travel	mm	650(up 150 /down 500)	
Rapid Travel AC Motor		0.75Kw/1Hp AC 3 Phase 4 Poles x 1/20	
Rapid Travel Speed	mm/min	358(50Hz)	
		428(60Hz)	
Reversal Slide		0.5mm/rev → ← 0.01mm	

※We reserve the right to modify the design and specifications without notice in advance.



STANDARD ACCESSORIES		
Spindle Motor(15HP)		●
Rapid Travel AC Motor		●
OPTIONAL ACCESSORIES (APOLEGAMY)		
Pneumatic Blade Locking Device		○
Bearing Guide Screw		○
Pneumatic Leveler		○
IK-A90 Angular Head		○
IK-D90 Deep Head		○
IK-U90 Universal Head		○
IK-U45 Universal Head		○
Place of Origin	Taiwan	
Weight (Approximate)	kg	800
Warranty	1 year (non artificial mistake)	

※We reserve the right to modify the design and specifications without notice in advance.

