


JIA CHENG
ELECTRIC CO., LTD.





BBM Direct Drive Torque Motor



www.jcmotor.com.tw

(第三版)

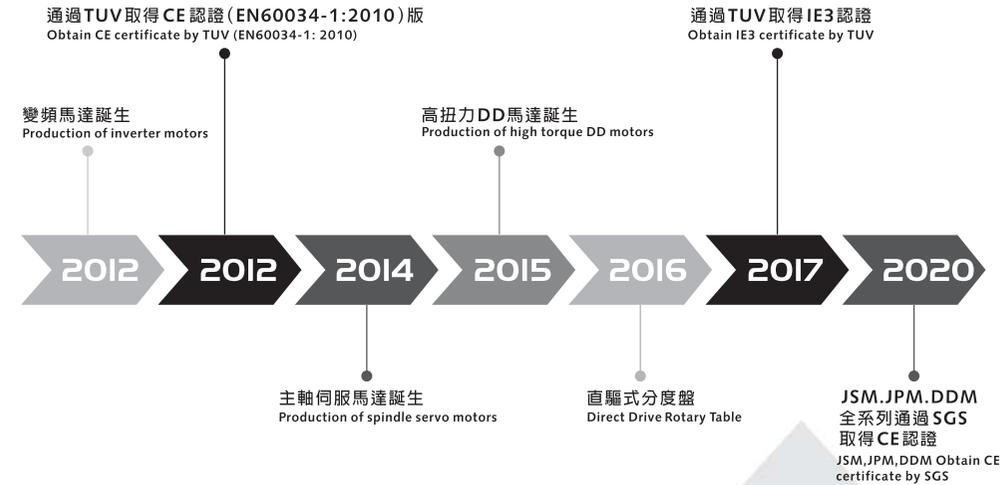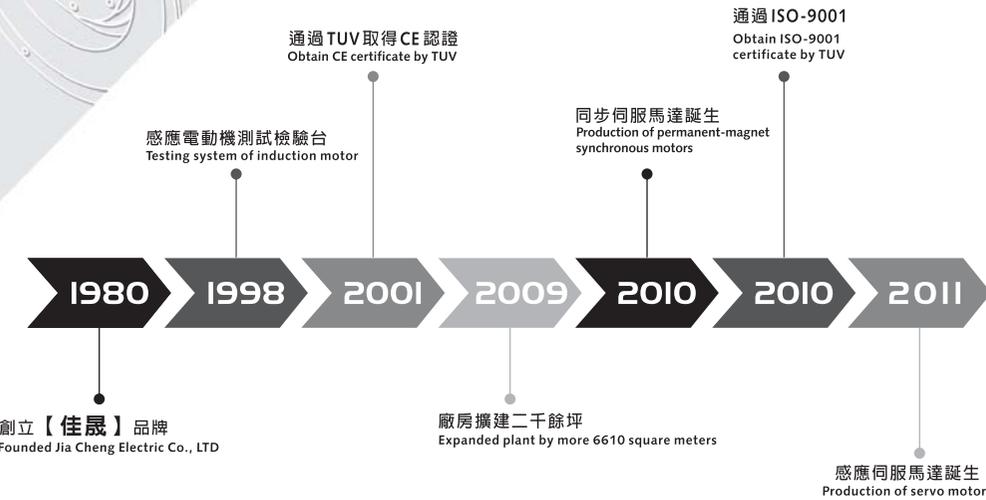

公司簡介 Introduction

目錄 Contents

七大產品

DDM-175-030/050/070/100/150	•01-02
DDM-210-030/050/070/100/150	•03-04
DDM-291-030/050/070/100/150	•05-06
DDM-360-030/050/070/100/150	•07-08
DDM-450-030/050/070/100/150	•09-10
DDMK-175-050/070/100/150	•11-12
DDMK-291-050/070/100/150	•13-14

熱保護裝置



Thermal Protection Configurations

動力線與溫度訊號線

Power and Temperature Sensor



規格 Specification		DDM175-030	DDM175-050	DDM175-070	DDM175-100	DDM175-150
Vdc	輸入電壓 Nominal Input Voltage	VDC 300 VDC				
Tr	額定扭力 Rated Torque	Nm 14.9	Nm 24.3	Nm 33.5	Nm 47.3	Nm 70.4
Ir	額定電流 Rated Current	Arms 4.4	Arms 4.3	Arms 4.3	Arms 4.2	Arms 4.2
Pr	額定功率 Rated Power	kw 0.72	kw 0.75	kw 0.75	kw 0.76	kw 0.75
Vr	額定轉速 Rated Speed	rpm 450	rpm 290	rpm 210	rpm 150	rpm 100
Ke	反電動勢常數 Back EMF Constant	Vrms/100rpm 21.6	Vrms/100rpm 36.1	Vrms/100rpm 50.5	Vrms/100rpm 72.1	Vrms/100rpm 107.0
Kt	扭力常數 Torque Constant	Nm/Arms 3.58	Nm/Arms 5.96	Nm/Arms 8.35	Nm/Arms 11.9	Nm/Arms 17
P	極數 Number of Poles	— 22	— 22	— 22	— 22	— 22
Vm	最高轉速 Max. Speed	rpm 900	rpm 600	rpm 400	rpm 300	rpm 200
Nm	最大扭力 Max. Torque	Nm 44.7	Nm 72.9	Nm 100.5	Nm 141.9	Nm 211.2
J	轉子慣量 Rotor Inertia	kg-cm ² 27	kg-cm ² 45	kg-cm ² 63	kg-cm ² 90	kg-cm ² 130
R20	電阻 20°C Electrical Resistance at 20°C	Ohm 4.25	Ohm 5.78	Ohm 7.3	Ohm 9.58	Ohm 13.3
L1	電感 Electrical Inductance	mH 22.2	mH 37	mH 51.8	mH 74	mH 111
Mr	轉子重量 Rotor Weight	kg 1.0	kg 1.7	kg 2.3	kg 3.3	kg 5.0
Ms	定子重量 Stator Weight	kg 7.1	kg 9.2	kg 11.7	kg 14.8	kg 21.1
	溫度感測器 Temperature Sensor	KTY84-130(紅色Red、粉色Pink、黑色Black、灰色Gray) PTC 130(白色White、棕色Brown)				
Tr	額定扭力 (水冷) Rated Torque(Water cooling)	Nm 31.8	Nm 54.1	Nm 76.1	Nm 110	Nm 166
Ir	額定電流 (水冷) Rated Current(Water cooling)	Arms 9.42	Arms 9.61	Arms 9.67	Arms 9.8	Arms 9.87
Pr	額定功率 (水冷) Rated Power(Water cooling)	kw 1.5	kw 1.7	kw 1.7	kw 1.8	kw 1.8
Vdc	輸入電壓 Nominal Input Voltage	VDC 600 VDC				
Vm	最高轉速 Max. Speed	rpm 1260	rpm 750	rpm 525	rpm 360	rpm 300

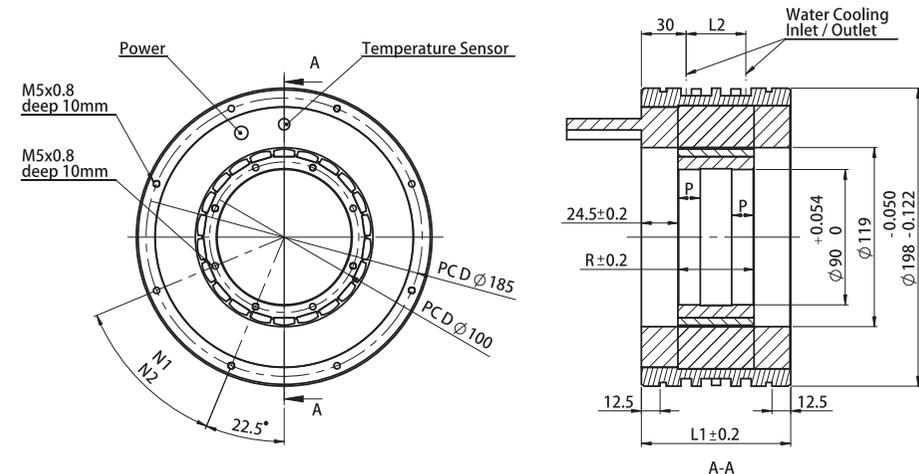

	L1	L2	R	P	N1	N2
DDM175-030	80	20	31	10	8x45°	8x45°
DDM175-050	100	40	51	15	8x45°	8x45°
DDM175-070	120	60	71	15	8x45°	8x45°
DDM175-100	150	90	101	15	16x22.5°	16x22.5°
DDM175-150	200	140	151	15	16x22.5°	16x22.5°



DDM Direct Drive Torque Motor

由於本產品持續開發中，因此本公司保留隨時修改產品的設計、特性或是規格變更的權利，恕不另行通知。

DDM 高扭力DD馬達

Due to we continue to develop the products, we reserve the right to modify or improve the designs, features or specifications of our product at any time without notice.

規格 Specification		DDM210-030	DDM210-050	DDM210-070	DDM210-100	DDM210-150
Vdc	輸入電壓 Nominal Input Voltage	VDC 300 VDC				
Tr	額定扭力 Rated Torque	Nm 28.9	Nm 47.6	Nm 64.6	Nm 91.9	Nm 138
Ir	額定電流 Rated Current	Arms 4.4	Arms 4.4	Arms 4.3	Arms 8.4	Arms 8.3
Pr	額定功率 Rated Power	kw 0.77	kw 0.76	kw 0.76	kw 1.47	kw 1.47
Vr	額定轉速 Rated Speed	rpm 250	rpm 150	rpm 110	rpm 150	rpm 100
Ke	反電動勢常數 Back EMF Constant	Vrms/100rpm 38.8	Vrms/100rpm 67.2	Vrms/100rpm 94.2	Vrms/100rpm 67.9	Vrms/100rpm 102.4
Kt	扭力常數 Torque Constant	Nm/Arms 6.4	Nm/Arms 10.8	Nm/Arms 15.6	Nm/Arms 11.2	Nm/Arms 16.9
P	極數 Number of Poles	— 44	— 44	— 44	— 44	— 44
Vm	最高轉速 Max. Speed	rpm 500	rpm 300	rpm 250	rpm 300	rpm 250
Nm	最大扭力 Max. Torque	Nm 86.7	Nm 142.6	Nm 193.8	Nm 275.7	Nm 414
J	轉子慣量 Rotor Inertia	kg-cm ² 85	kg-cm ² 140	kg-cm ² 200	kg-cm ² 290	kg-cm ² 450
R20	電阻 20°C Electrical Resistance at 20°C	Ohm 6.1	Ohm 7.8	Ohm 9.15	Ohm 2.83	Ohm 3.88
L1	電感 Electrical Inductance	mH 18.8	mH 28.7	mH 38.4	mH 15.1	mH 22.8
Mr	轉子重量 Rotor Weight	kg 1.4	kg 2.4	kg 3.5	kg 5.0	kg 7.6
Ms	定子重量 Stator Weight	kg 7.0	kg 8.0	kg 16.0	kg 13.4	kg 19.8
	溫度感測器 Temperature Sensor	KTY84-130(紅色Red、粉色Pink、黑色Black、灰色Gray) PTC 130(白色White、棕色Brown)				
Tr	額定扭力 (水冷) Rated Torque(Water cooling)	Nm 67.3	Nm 118	Nm 167	Nm 244	Nm 368
I	額定電流 (水冷) Rated Current(Water cooling)	Arms 11.2	Arms 11.5	Arms 11.5	Arms 23.3	Arms 23.3
Pr	額定功率 (水冷) Rated Power(Water cooling)	kw 1.8	kw 1.9	kw 2.0	kw 3.9	kw 3.9
Vdc	輸入電壓 Nominal Input Voltage	VDC 600 VDC				
Vm	最高轉速 Max. Speed	rpm 790	rpm 460	rpm 320	rpm 460	rpm 300

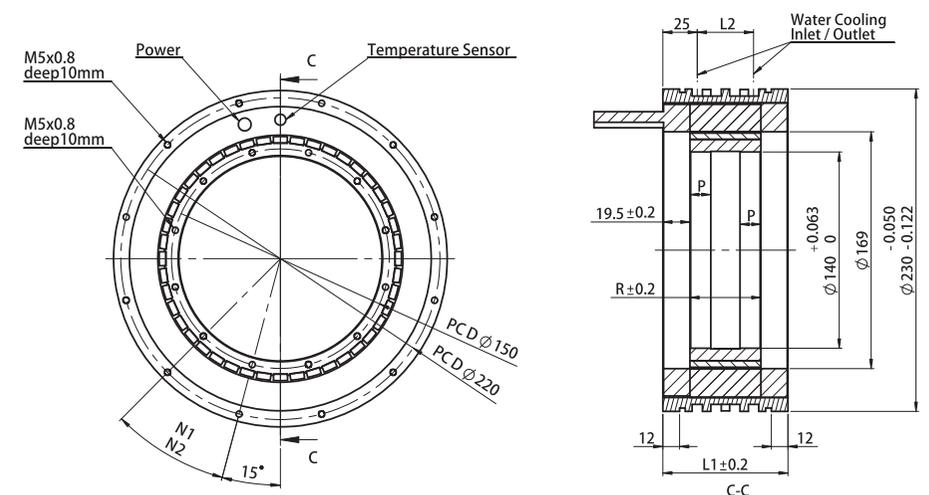

	L1	L2	R	P	N1	N2
DDM210-030	70	20	31	10	12x30°	12x30°
DDM210-050	90	40	51	15	12x30°	12x30°
DDM210-070	110	60	71	15	12x30°	12x30°
DDM210-100	140	90	101	15	24x15°	24x15°
DDM210-150	190	140	151	15	24x15°	24x15°

DDM Direct Drive Torque Motor

DDM 高扭力DD馬達


由於本產品持續開發中，因此本公司保留隨時修改產品的設計、特性或是規格變更的權利，恕不另行通知。

Due to we continue to develop the products, we reserve the right to modify or improve the designs, features or specifications of our product at any time without notice.

規格 Specification		DDM291-030	DDM291-050	DDM291-070	DDM291-100	DDM291-150
Vdc	輸入電壓 Nominal Input Voltage	VDC 300 VDC				
Tr	額定扭力 Rated Torque	Nm 60	Nm 97.6	Nm 135	Nm 189	Nm 281
Ir	額定電流 Rated Current	Arms 7.6	Arms 7.4	Arms 10	Arms 7.1	Arms 7.1
Pr	額定功率 Rated Power	kw 1.28	kw 1.2	kw 1.5	kw 1.2	kw 1.50
Vr	額定轉速 Rated Speed	rpm 200	rpm 120	rpm 110	rpm 60	rpm 50
Ke	反電動勢常數 Back EMF Constant	Vrms/100rpm 51.5	Vrms/100rpm 85.8	Vrms/100rpm 95.7	Vrms/100rpm 171.6	Vrms/100rpm 257.5
Kt	扭力常數 Torque Constant	Nm/Arms 8.5	Nm/Arms 14.2	Nm/Arms 15.8	Nm/Arms 28.3	Nm/Arms 42.5
P	極數 Number of Poles	— 44	— 44	— 44	— 44	— 44
Vm	最高轉速 Max. Speed	rpm 400	rpm 250	rpm 250	rpm 150	rpm 100
Nm	最大扭力 Max. Torque	Nm 180	Nm 292.8	Nm 405	Nm 567	Nm 843
J	轉子慣量 Rotor Inertia	kg-cm ² 230	kg-cm ² 390	kg-cm ² 521	kg-cm ² 790	kg-cm ² 1100
R20	電阻 20°C Electrical Resistance at 20°C	Ohm 2.3	Ohm 3.71	Ohm 2.5	Ohm 5.3	Ohm 7.32
L1	電感 Electrical Inductance	mH 13.5	mH 22.4	mH 19.7	mH 44.7	mH 67
Mr	轉子重量 Rotor Weight	kg 2.1	kg 3.5	kg 4.5	kg 6.9	kg 10.4
Ms	定子重量 Stator Weight	kg 12.6	kg 16.7	kg 23	kg 27.3	kg 38.7
	溫度感測器 Temperature Sensor	KTY84-130(紅色Red、粉色Pink、黑色Black、灰色Gray) PTC 130(白色White、棕色Brown)				
Tr	額定扭力 (水冷) Rated Torque(Water cooling)	Nm 132	Nm 225	Nm 305	Nm 456	Nm 689
Ir	額定電流 (水冷) Rated Current(Water cooling)	Arms 17	Arms 17.4	Arms 23	Arms 17.6	Arms 17.9
Pr	額定功率 (水冷) Rated Power(Water cooling)	kw 2.8	kw 2.4	kw 4.9	kw 2.4	kw 3.7
Vdc	輸入電壓 Nominal Input Voltage	VDC 600 VDC				
Vm	最高轉速 Max. Speed	rpm 600	rpm 350	rpm 320	rpm 180	rpm 120

DDM Direct Drive Torque Motor

由於本產品持續開發中，因此本公司保留隨時修改產品的設計、特性或是規格變更的權利，恕不另行通知。

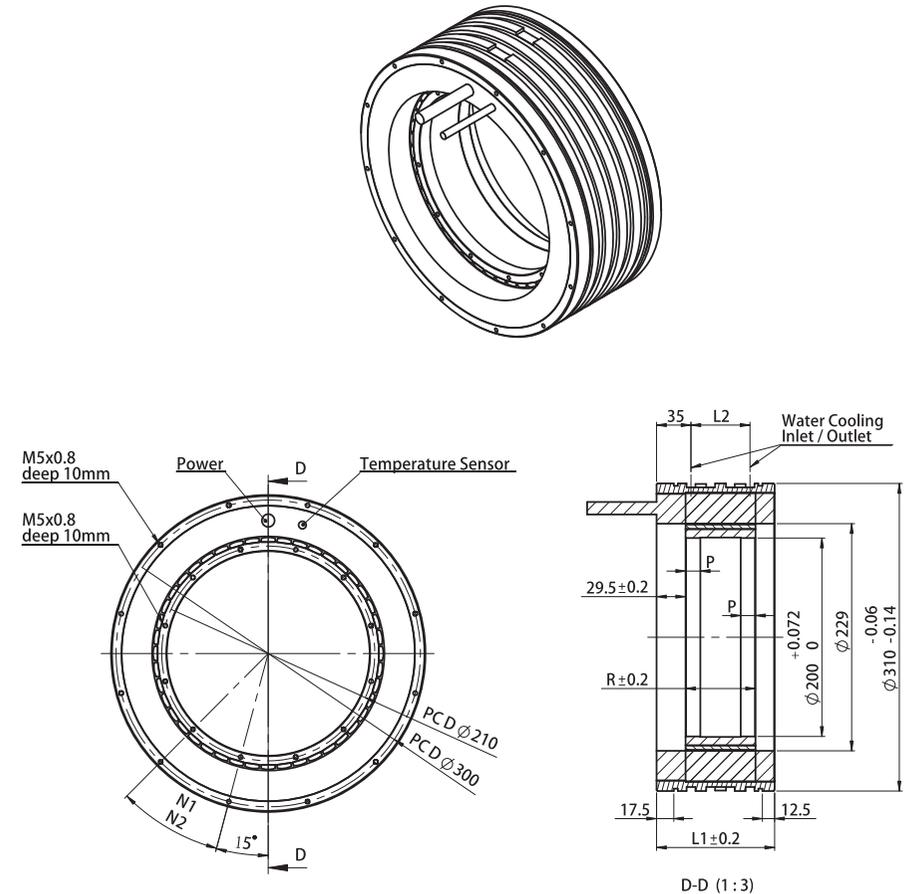

	L1	L2	R	P	N1	N2
DDM291-030	80	20	31	10	12x30°	12x30°
DDM291-050	100	40	51	15	12x30°	12x30°
DDM291-070	120	60	71	15	12x30°	12x30°
DDM291-100	150	90	101	15	24x15°	24x15°
DDM291-150	200	140	151	15	24x15°	24x15°


DDM 高扭力DD馬達

Due to we continue to develop the products, we reserve the right to modify or improve the designs, features or specifications of our product at any time without notice.

規格 Specification		DDM360-030	DDM360-050	DDM360-070	DDM360-100	DDM360-150
Vdc	輸入電壓 Nominal Input Voltage	VDC 300 VDC				
Tr	額定扭力 Rated Torque	Nm 112	Nm 180	Nm 247	Nm 344	Nm 512
Ir	額定電流 Rated Current	Arms 6.4	Arms 6.2	Arms 12.2	Arms 11.8	Arms 18
Pr	額定功率 Rated Power	kw 1.20	kw 0.96	kw 2.11	kw 1.84	kw 2.73
Vr	額定轉速 Rated Speed	rpm 100	rpm 50	rpm 80	rpm 50	rpm 50
Ke	反電動勢常數 Back EMF Constant	Vrms/100rpm 107.8	Vrms/100rpm 179	Vrms/100rpm 121.1	Vrms/100rpm 179	Vrms/100rpm 174.5
Kt	扭力常數 Torque Constant	Nm/Arms 17.8	Nm/Arms 29.7	Nm/Arms 20.8	Nm/Arms 29.7	Nm/Arms 28.6
P	極數 Number of Poles	66	66	66	66	66
Vm	最高轉速 Max. Speed	rpm 200	rpm 150	rpm 200	rpm 150	rpm 150
Nm	最大扭力 Max. Torque	Nm 336	Nm 540	Nm 741	Nm 1032	Nm 1524
J	轉子慣量 Rotor Inertia	kg-cm ² 650	kg-cm ² 1000	kg-cm ² 1500	kg-cm ² 2100	kg-cm ² 3200
R20	電阻 20°C Electrical Resistance at 20°C	Ohm 4.72	Ohm 6.42	Ohm 2.08	Ohm 2.71	Ohm 1.53
L1	電感 Electrical Inductance	mH 27.4	mH 45.7	mH 15.3	mH 22.8	mH 11.9
Mr	轉子重量 Rotor Weight	kg 3.3	kg 5.5	kg 7.7	kg 11	kg 16.5
Ms	定子重量 Stator Weight	kg 19.1	kg 24.5	kg 30.7	kg 38.7	kg 54.4
	溫度感測器 Temperature Sensor	KTY84-130(紅色Red、粉色Pink、黑色Black、灰色Gray) PTC 130(白色White、棕色Brown)				
Tr	額定扭力 (水冷) Rated Torque(Water cooling)	Nm 230	Nm 393	Nm 554	Nm 800	Nm 1217
Ir	額定電流 (水冷) Rated Current(Water cooling)	Arms 14.3	Arms 14.7	Arms 29.8	Arms 30.2	Arms 47
Pr	額定功率 (水冷) Rated Power(Water cooling)	kw 2.5	kw 2.1	kw 4.7	kw 4.3	kw 6.5
Vdc	輸入電壓 Nominal Input Voltage	VDC 600 VDC				
Vm	最高轉速 Max. Speed	rpm 250	rpm 140	rpm 210	rpm 170	rpm 170

DDM Direct Drive Torque Motor

由於本產品持續開發中，因此本公司保留隨時修改產品的設計、特性或是規格變更的權利，恕不另行通知。

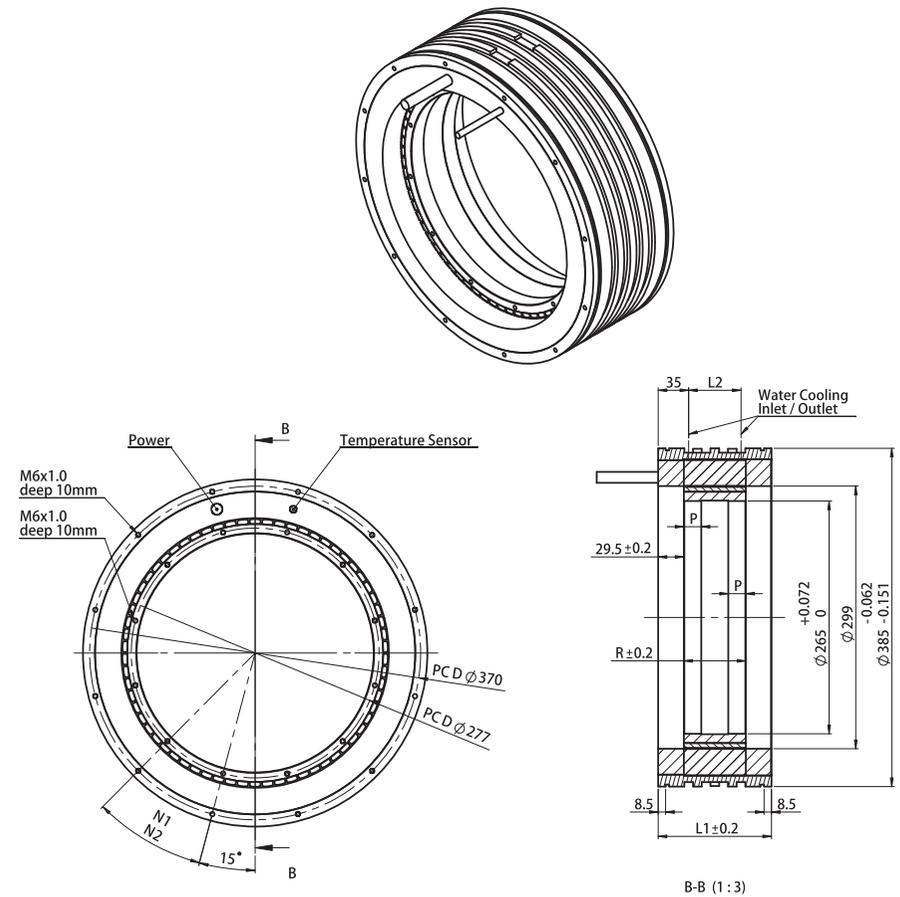

	L1	L2	R	P	N1	N2
DDM360-030	90	20	31	10	12x30°	12x30°
DDM360-050	110	40	51	20	12x30°	12x30°
DDM360-070	130	60	71	20	12x30°	12x30°
DDM360-100	160	90	101	20	24x15°	24x15°
DDM360-150	210	140	151	20	24x15°	24x15°


DDM 高扭力DD馬達

Due to we continue to develop the products, we reserve the right to modify or improve the designs, features or specifications of our product at any time without notice.

規格 Specification		DDM450-030	DDM450-050	DDM450-070	DDM450-100	DDM450-150
Vdc	輸入電壓 Nominal Input Voltage	VDC 300 VDC				
Tr	額定扭力 Rated Torque	Nm 182	Nm 293	Nm 402	Nm 561	Nm 826
Ir	額定電流 Rated Current	Arms 12.2	Arms 11.8	Arms 11.6	Arms 11.3	Arms 22.1
Pr	額定功率 Rated Power	kw 1.94	kw 1.88	kw 2.15	kw 1.80	kw 4.41
Vr	額定轉速 Rated Speed	rpm 100	rpm 60	rpm 50	rpm 30	rpm 50
Ke	反電動勢常數 Back EMF Constant	Vrms/100rpm 93.9	Vrms/100rpm 157	Vrms/100rpm 219.8	Vrms/100rpm 313.1	Vrms/100rpm 249
Kt	扭力常數 Torque Constant	Nm/Arms 15.5	Nm/Arms 25.9	Nm/Arms 36.2	Nm/Arms 51.7	Nm/Arms 38.8
P	極數 Number of Poles	— 88	— 88	— 88	— 88	— 88
Vm	最高轉速 Max. Speed	rpm 250	rpm 150	rpm 100	rpm 80	rpm 100
Nm	最大扭力 Max. Torque	Nm 546	Nm 879	Nm 1206	Nm 1683	Nm 2478
J	轉子慣量 Rotor Inertia	kg-cm ² 1600	kg-cm ² 2600	kg-cm ² 3700	kg-cm ² 5300	kg-cm ² 8000
R20	電阻 20°C Electrical Resistance at 20°C	Ohm 1.75	Ohm 2.38	Ohm 3.01	Ohm 3.99	Ohm 1.49
L1	電感 Electrical Inductance	mH 11.5	mH 19.1	mH 26.7	mH 38.2	mH 11.2
Mr	轉子重量 Rotor Weight	kg 4.9	kg 8.2	kg 11.4	kg 16.3	kg 24.5
Ms	定子重量 Stator Weight	kg 30	kg 38.4	kg 47.6	kg 59.9	kg 83.2
	溫度感測器 Temperature Sensor	KTY84-130(紅色Red、粉色Pink、黑色Black、灰色Gray) PTC 130(白色White、棕色Brown)				
Tr	額定扭力 (水冷) Rated Torque(Water cooling)	Nm 365	Nm 620	Nm 872	Nm 1260	Nm 1890
Ir	額定電流 (水冷) Rated Current(Water cooling)	Arms 27	Arms 27.7	Arms 27.8	Arms 28.1	Arms 56.3
Pr	額定功率 (水冷) Rated Power(Water cooling)	kw 3.9	kw 4.0	kw 4.7	kw 4.0	kw 10.1
Vdc	輸入電壓 Nominal Input Voltage	VDC 600 VDC				
Vm	最高轉速 Max. Speed	rpm 300	rpm 180	rpm 130	rpm 90	rpm 120

DDM Direct Drive Torque Motor

由於本產品持續開發中，因此本公司保留隨時修改產品的設計、特性或是規格變更的權利，恕不另行通知。

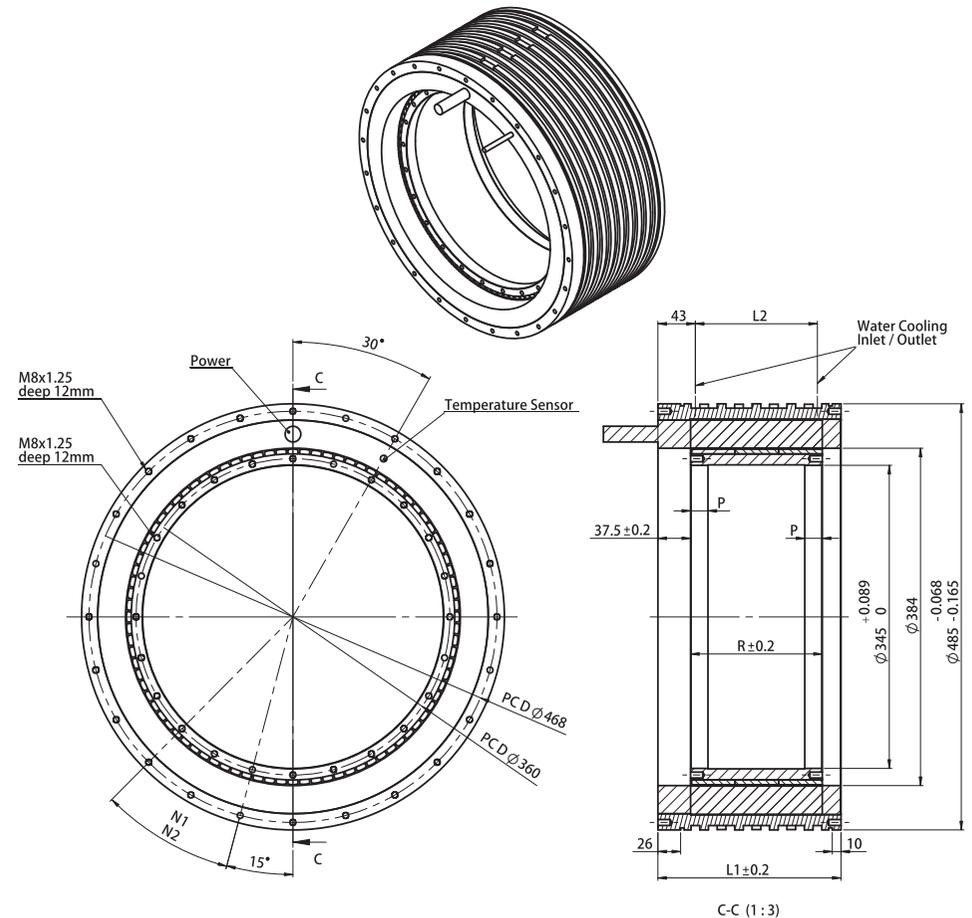


	L1	L2	R	P	N1	N2
DDM450-030	90	20	31	10	12x30°	12x30°
DDM450-050	110	40	51	20	12x30°	12x30°
DDM450-070	130	60	71	20	12x30°	12x30°
DDM450-100	160	90	101	20	24x15°	24x15°
DDM450-150	210	140	151	20	24x15°	24x15°

DDM 高扭力DD馬達

Due to we continue to develop the products, we reserve the right to modify or improve the designs, features or specifications of our product at any time without notice.

規格 Specification		DDMK175-050	DDMK175-070	DDMK175-100	DDMK175-150	
Vdc	輸入電壓 Nominal Input Voltage	VDC STANDARD MODE 600 VDC				
Tr	額定扭力 (水冷) Rated Torque(Water cooling)	Nm	79.8	113	166	249
Ir	額定電流 (水冷) Rated Current(Water cooling)	Arms	26.2	26.5	27.7	27.7
Pr	額定功率 Rated Power	kw	10.0	9.9	9.7	9.2
Vr	額定轉速 Rated Speed	rpm	1170	818	546	345
Ke	反電動勢常數 Back EMF Constant	Vrms/100rpm	23.66	33.09	47.33	70.89
Kt	扭力常數 Torque Constant	Nm/Arms	3.86	5.4	7.72	11.6
P	極數 Number of Poles	—	22	22	22	22
Vm	最高轉速 Max. Speed	rpm	1770	1270	886	591
R20	電阻 20°C Electrical Resistance at 20°C	Ohm	1.2	1.5	1.99	2.4
Ld/Lq	電感 Electrical Inductance	mH	10.3/7.5	13.7/10.4	18.7/14.2	30.2/24.0
J	轉子慣量 Rotor Inertia	kg·cm ²	90.8	122	169	247
Mr	轉子重量 Rotor Weight	kg	4.54	5.85	7.81	11.1
Ms	定子重量 Stator Weight	kg	10.8	13.2	16.1	22.4
Vdc	輸入電壓 Nominal Input Voltage	VDC FIELD WEAKENING 600 VDC				
Vr	額定轉速 Rated Speed	rpm	1380	976	665	432
Pr	額定功率 Rated Power	kw	11.8	11.8	11.8	11.5
Vm	最高轉速 Max. Speed	rpm	5420	4270	2990	1990
	溫度感測器 Temperature Sensor	KTY84-130(紅色Red、粉色Pink、黑色Black、灰色Gray) PTC 130(白色White、棕色Brown)				

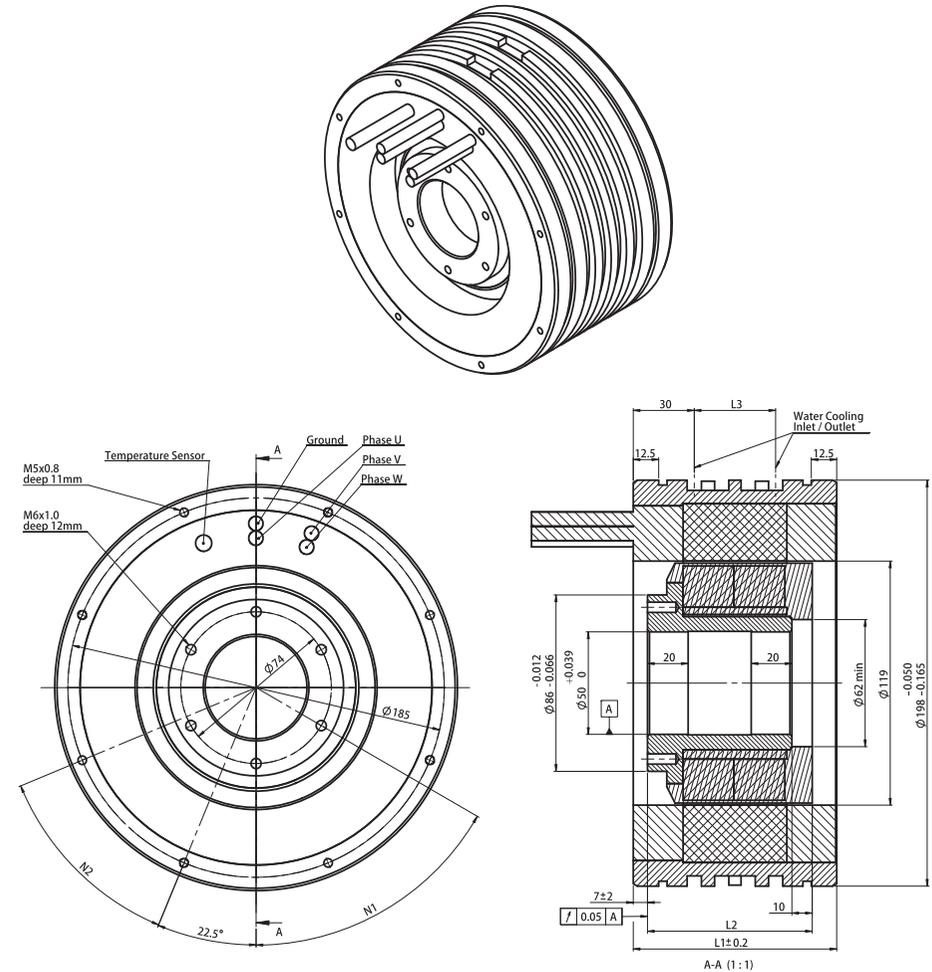

	L1	L2	L3	N1	N2
DDMK175-050	100	81	40	6x60°	8x45°
DDMK175-070	120	101	60	6x60°	8x45°
DDMK175-100	150	131	90	12x30°	16x22.5°
DDMK175-150	200	181	140	12x30°	16x22.5°




DDM Direct Drive Torque Motor

由於本產品持續開發中，因此本公司保留隨時修改產品的設計、特性或是規格變更的權利，恕不另行通知。

DDM 高扭力DD馬達

Due to we continue to develop the products, we reserve the right to modify or improve the designs, features or specifications of our product at any time without notice.

規格 Specification		DDMK291-050	DDMK291-070	DDMK291-100	DDMK291-150
Vdc	輸入電壓 Nominal Input Voltage	VDC STANDARD MODE 600 VDC			
Tr	額定扭力 (水冷) Rated Torque(Water cooling)	Nm 288	402	572	840
Ir	額定電流 (水冷) Rated Current(Water cooling)	Arms 66.1	66.9	67.9	71.3
Pr	額定功率 Rated Power	kw 26.3	25.6	24.5	23.2
Vr	額定轉速 Rated Speed	rpm 855	596	402	264
Ke	反電動勢常數 Back EMF Constant	Vrms/100rpm 32.7	45.55	64.7	95.2
Kt	扭力常數 Torque Constant	Nm/Arms 3.44	7.53	8.42	11.78
P	極數 Number of Poles	— 44	44	44	44
Vm	最高轉速 Max. Speed	rpm 1320	950	670	440
R20	電阻 20°C Electrical Resistance at 20°C	Ohm 0.293	0.356	0.489	0.59
Ld/Lq	電感 Electrical Inductance	mH 1.87/1.45	2.6/1.98	3.58/2.79	5.44/4.21
J	轉子慣量 Rotor Inertia	kg·cm ² 1057	1383	1882	2706
Mr	轉子重量 Rotor Weight	kg 11.8	15.5	21	30.1
Ms	定子重量 Stator Weight	kg 18.2	23	29.6	41.7
Vdc	輸入電壓 Nominal Input Voltage	VDC FIELD WEAKENING 600 VDC			
Vr	額定轉速 Rated Speed	rpm 990	688	464	294
Pr	額定功率 Rated Power	kw 30.4	29.5	28.3	25.9
Vm	最高轉速 Max. Speed	rpm 2730	2730	2410	1610
溫度感測器 Temperature Sensor		KTY84-130(紅色Red、粉色Pink、黑色Black、灰色Gray) PTC 130(白色White、棕色Brown)			

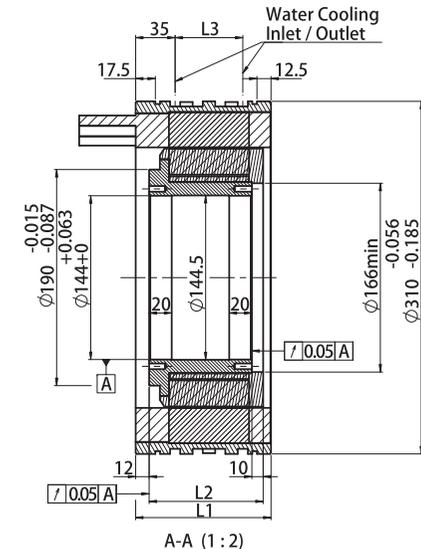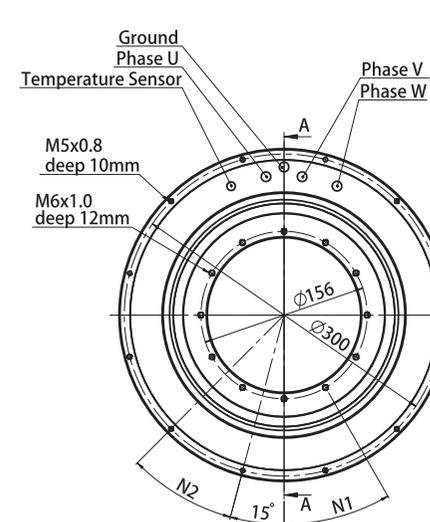




	L1	L2	L3	N1	N2
DDMK291-050	100	81	40	12x30°	12x30°
DDMK291-070	120	101	60	12x30°	12x30°
DDMK291-100	150	131	90	24x15°	24x15°
DDMK291-150	200	181	140	24x15°	24x15°

DDM Direct Drive Torque Motor

由於本產品持續開發中，因此本公司保留隨時修改產品的設計、特性或是規格變更的權利，恕不另行通知。

DDM 高扭力DD馬達


Due to we continue to develop the products, we reserve the right to modify or improve the designs, features or specifications of our product at any time without notice.

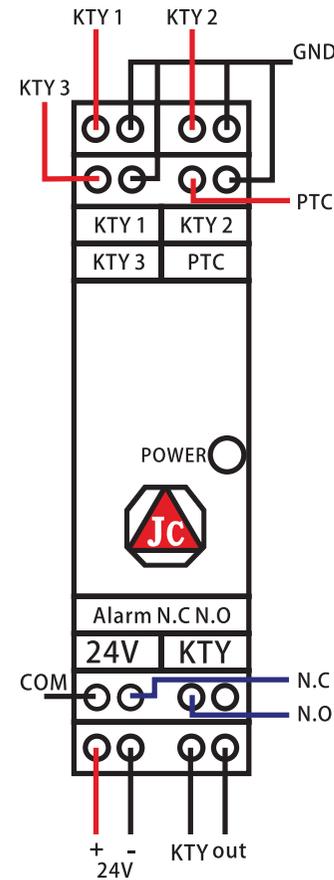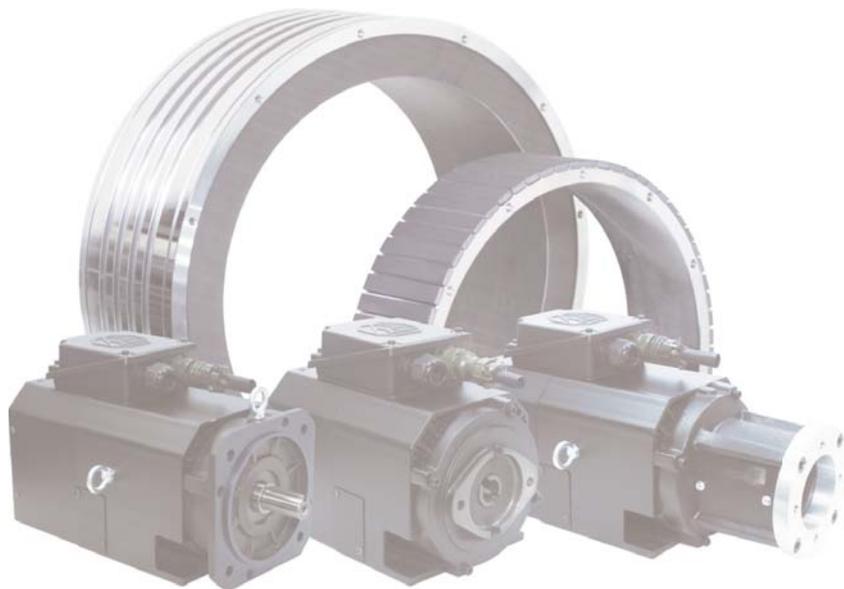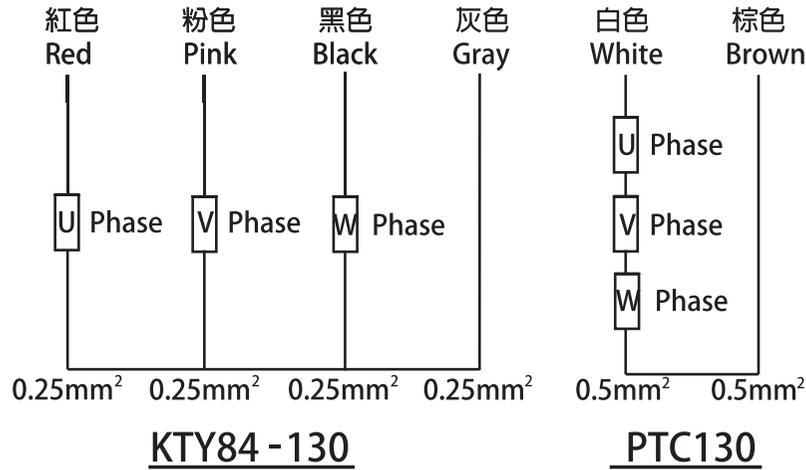

品名	TM-K33
接點	KTY*3、PTC、Alarm *1
規格	PTC 130 KTY 84/130 Alarm 120VAC/24VDC
功能	1.任意一組KTY溫度升至100°C Alarm接點跳脫 溫度低於80°C復歸 2.PTC溫度升至130°C±10°C Alarm接點跳脫 溫度低於130°C復歸
燈號	1.POWER 綠燈 - 正常 紅燈 - 異常 傳感器未接好 溫度大於100°C

Product name	TM-K33
Contact	KTY*3、PTC、Alarm *1
Specification	PTC 130 KTY 84/130 Alarm 120VAC/24VDC
Features	1.Any of KTY temperatures rise over 100°C Alarm contact trip temperature below 80°C Alarm contact reset 2.PTC temperatures rise over 130°C ± 10°C Alarm contact trip temperature below 130°C Alarm contact reset
Light	1.POWER Green - Normal Red - Error The sensor is not connected Temperature >100°C

JIA CHENG 動力線與溫度訊號線 Power and Temperature Sensor

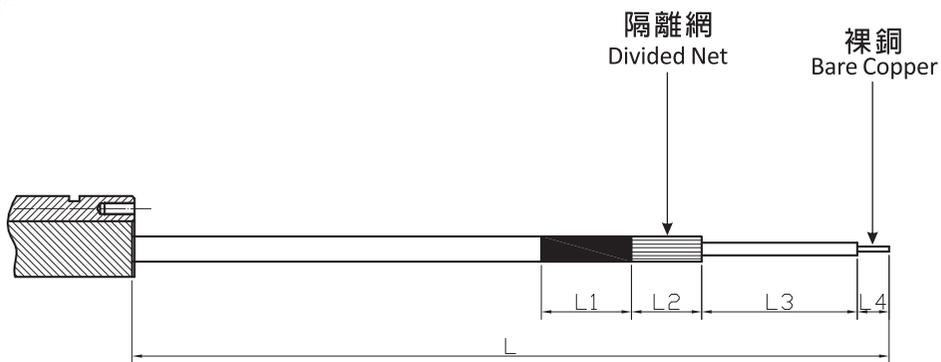

(單位 mm)


Type	L	L1	L2	L3	L4
DDM175	500	30	20	40	10
DDM210	500	30	20	40	10
DDM291	1000	30	20	40	10
DDM360	1945	30	20	40	10
DDM450	1945	30	20	40	10
DDMK175	1000	30	20	40	10
DDMK291	1000	30	20	40	10

客戶可指定其它出線的長度，請洽本公司業務！

The length is customizable ; Please contact and offer.

DDM Direct Drive Torque Motor



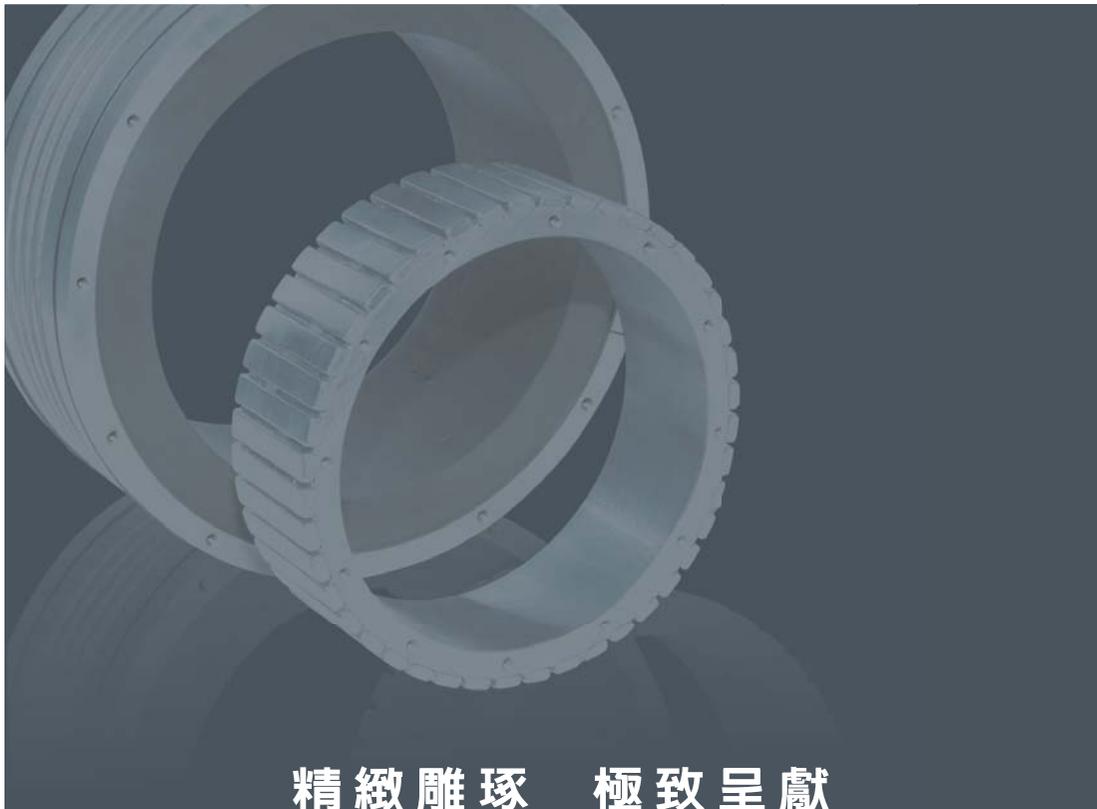

精緻雕琢 極致呈獻



佳晟電機股份有限公司
JIA CHENG ELECTRIC CO., LTD

42085 台中市豐原區萬年路 51 號
No.51, WAN NIAN RD., FENG YUAN DIST.,
TAICHUNG CITY, TAIWAN.
TEL:886-4-25233359
FAX:886-4-25278584
Http://www.jcmotor.com.tw

經銷商 Distributed:

