





\varnothing 50
 \varnothing 63
 \varnothing 66
 \varnothing 80



\varnothing 100
 \varnothing 160

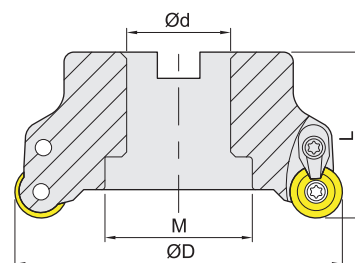

Metric

| Item code | | Dimensions, mm | | | | Teeth | Insert | Spare parts | Weight Kg |
|--------------------|------------------|----------------|------|----|----|-------|------------|-------------|-----------|
| 無水孔 Non-coolant | 水孔 Coolant | D | d | L | M | | | | |
| RM-5R405-16.0 | | 40 | 16.0 | 40 | 9 | 5 | RD..10T3.. | ① | 0.21 |
| RM-5R504-22.0 | | 50 | 22.0 | 40 | 11 | 4 | | | 0.44 |
| RM-5R504-22.0-50H | | 50 | 22.0 | 50 | 11 | 4 | | | 0.44 |
| RM-5R505-22.0 | | 50 | 22.0 | 40 | 11 | 5 | | | 0.41 |
| RM-5R505-22.0-50H | | 50 | 22.0 | 50 | 11 | 5 | | | 0.41 |
| RM-5R525-22.0 | | 52 | 22.0 | 50 | 11 | 5 | | | 0.47 |
| RM-6R404-16.0 | RM-6R404-A16.0 | 40 | 16.0 | 50 | 9 | 4 | RD..1204 | ③ | 0.39 |
| RM-6R504-22.0 | | 50 | 22.0 | 50 | 11 | 4 | | | 0.39 |
| RM-6R505-22.0 | RM-6R505-A22.0 | 50 | 22.0 | 50 | 11 | 5 | RD..1204 | ② | 0.41 |
| RM-6R525-22.0 | | 52 | 22.0 | 50 | 11 | 5 | | | 0.43 |
| RM-6R635-22.0 | | 63 | 22.0 | 50 | 11 | 5 | RD..1204 | ③ | 0.70 |
| RM-6R636-22.0 | RM-6R636-A22.0 | 63 | 22.0 | 50 | 11 | 6 | | | 0.72 |
| RM-6R666-22.0 | RM-6R666-A22.0 | 66 | 22.0 | 50 | 11 | 6 | | | 0.76 |
| RM-6R635-27.0 | | 63 | 27.0 | 50 | 13 | 5 | | | 0.64 |
| RM-6R666-27.0 | RM-6R666-A27.0 | 66 | 27.0 | 50 | 13 | 6 | | 0.76 | |
| RM-6R805-27.0 | | 80 | 27.0 | 50 | 13 | 5 | | 1.00 | |
| RM-6R806-27.0 | | 80 | 27.0 | 50 | 13 | 6 | | 0.98 | |
| | RM-6R807-A27.0 | 80 | 27.0 | 50 | 13 | 7 | | 1.00 | |
| RM-8R503-22.0 ※ | RM-8R503-A22.0 ※ | 50 | 22.0 | 50 | 11 | 3 | RD..1604 | ④ | 0.44 |
| RM-8R524-22.0 | | 52 | 22.0 | 50 | 11 | 4 | | | 0.40 |
| NEW RM-8R665-22.0 | | 66 | 22.0 | 50 | 11 | 5 | | | 0.59 |
| RM-8R635-27.0 | | 63 | 27.0 | 50 | 13 | 5 | | | 0.54 |
| RM-8R664-27.0 | | 66 | 27.0 | 50 | 13 | 4 | | | 0.63 |
| RM-8R665-27.0 | | 66 | 27.0 | 50 | 13 | 5 | | | 0.59 |
| RM-8R805-27.0 | | 80 | 27.0 | 50 | 13 | 5 | | | 0.94 |
| RM-8R806-27.0 | | 80 | 27.0 | 50 | 13 | 6 | | | 0.91 |
| NEW RM-8R1006-32.0 | | 100 | 32.0 | 50 | 45 | 6 | | | 1.32 |

※表示另附刀把螺絲HTM1045HS (※ The mill equips with a cap screw HTM1045HS)

BORING BARS 內徑車刀
 TOOL HOLDERS 外徑車刀
 THREADING & GROOVING 牙刀 & 開槽刀
 MILLING 銑刀
 BORING TOOLS COMPONENTS 孔加工
 SPARE PARTS 配件