

高性能迴轉頂針

HIGH-PERFORMANCE TYPE




www.lihsun.com

NCK


型 LIVE CENTER

迷宮式迴轉頂針無油封防水結構
專利號碼 M553237


MAZE TYPE, WATERPROOF DESIGNED
WITHOUT SEAL, PAT. NO. M553237



A TYPE

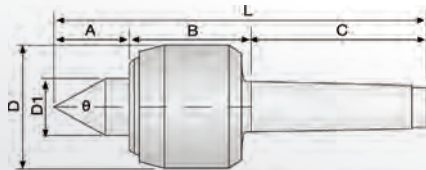

B TYPE

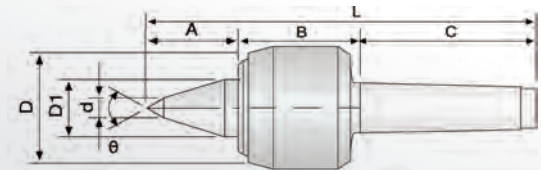


1. 心軸使用合金工具鋼之材質，經真空熱處理為 (HRC60° ± 1°) 具高鋼性及耐磨性。
2. 此頂針使用圓筒滾柱軸承及止推軸承。深溝滾珠軸承之組合，適合CNC車床使用、有防水設計，車床尾座調整壓力建議5~8公斤。

※ NCK-B型；適合小工作物加工使用。

1. The shaft is made of alloy steel and through vacuum heat treatment HRC60° ± 1°. It possesses great rigidity and high durability.
2. The center uses the combination of roller bearing, thrust ball bearing and ball bearing, the tailstock pressure of lathe adjusts to five to eight kilograms (for reference), the waterproof is maze type.
3. Applicable to CNC lathes, can be used at high speed turning, and is water-proof.

※ NCK-B type: Long nose live centers are suitable for small workpieces.

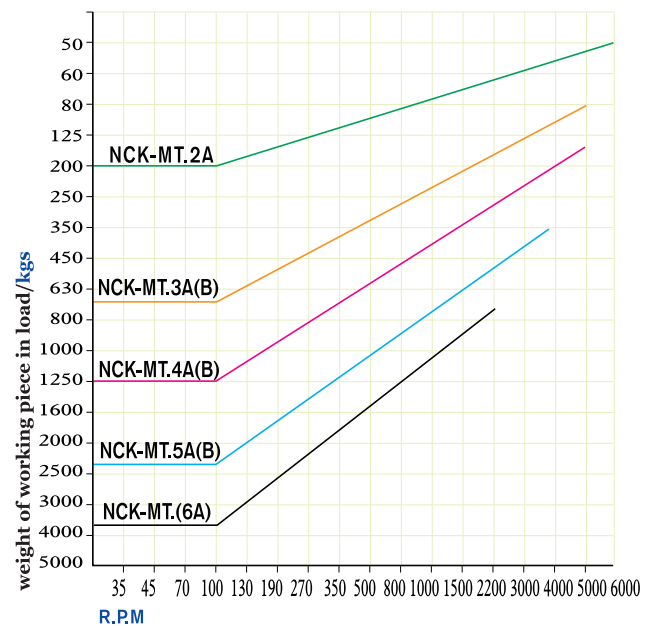

單位/Unit:mm

ORDER NO.	MORES TAPER MT/MK	A	B	C	D	D1	d	L	Co精度 Accuracy	Max R.P.M	θ	G.W. WEIGHT kgs	包裝尺寸 L x W x H
08010022	NCK-MT.2A	20	38	69	32	13	-	127	0.003	6000R.P.M	60°	0.38 kgs	180 x 50 x 40
08010023	NCK-MT.3A	34	61	86	58	25	-	181	0.003	5200R.P.M	60°	1.58 kgs	240 x 80 x 65
08010024	NCK-MT.4A	44	72	109	76	35	-	225	0.003	5000R.P.M	60°	3.04 kgs	257 x 100 x 90
08010025	NCK-MT.5A	60	91	136	95	45	-	287	0.003	3500R.P.M	60°	6.54 kgs	320 x 118 x 115
08010026	NCK-MT.6A	64	106	190	120	58	-	360	0.008	2300R.P.M	60°	15.0 kgs	425 x 185 x 180
08010033	NCK-MT.3B	45	61	86	58	25	10	192	0.003	5200R.P.M	60°	1.58 kgs	240 x 80 x 65
08010034	NCK-MT.4B	55	72	109	76	35	12	236	0.003	5000R.P.M	60°	3.10 kgs	257 x 100 x 90
08010035	NCK-MT.5B	70	91	136	95	45	14	297	0.003	3500R.P.M	60°	6.54 kgs	320 x 118 x 110

