



WALRUS
PUMP

TPH Series

Multistage Centrifugal Pump

IE3 
Motor



**Better Life
Through Innovation**

Content

General Data	03
Performance Range	04
Sectional Drawing	05
Performance Curves/Technical Data	
TPH 2T	06
TPH 4T	08
TPH 8T	10
TPH 12T	12
TPH 25T	14

TPH Series Multistage Centrifugal Pump

50 Hz

Power: 0.37 - 3.4 kW

Head: Up to 57 M

Flow: Up to 240 L/min

Outlet: 1" - 1 1/2"

Inlet: 1" - 1 1/2"

60 Hz

Power: 0.37 - 3.7 kW

Head: Up to 79 M

Flow: Up to 280 L/min

Outlet: 1" - 1 1/2"

Inlet: 1" - 1 1/2"



Construction Industry



Agriculture & Fishing Industry



Manufacturing Industry



Electricity & New Energy Industry



Entertainment & Leisure Industry



Accommodation & Food Service Industry



Wholesale & Retail Industry



Water Supply & Pollution Control



Service Industry



Product Features

- Horizontal multistage centrifugal pump, non self-priming, co-axial pump/motor design, impellers mounted on extended motor shaft. Main working parts made by stainless steel.

Applications

The TPH Series is horizontal multistage centrifugal pump, suitable for clean water/liquid without abrasive matters. The applications are versatile, such as pressure boosting, transfer, circulation, and machinery.

- Industrial circulation system
- Washing/cleaning system
- Pressure booster system
- Water/liquid transfer
- Agricultural irrigation

Model Code

	TPH	4T	2K	S	A	H	CH
Model type							
Nominal flow rate (m ³ /hr)							
Nominal head (kg/cm ²)							
N: SUS 316 (2T/4T)							
S: SUS 304							
Air conditioning (IP 44)							
Insulation class: H.							
Insulation class: H. (2T/4T)							
Mechanical seal type: MGSV (Carbon + SiC + Viton)							
Water temperature: +4°C ~ +120°C							
Oil temperature: +0°C ~ +150°C							

Operating Conditions

- Ambient temperature: Max. +40°C
- Liquid temperature range: +0°C ~ +90°C
- Operating pressure: Max. 10 kg/cm²
- Inlet pressure: Max. 6 kg/cm²

Motor


- Enclosure protection class: IP54
- Insulation class: F.
- Frequency range: 50/60 Hz
- Nominal speed: 2900/3500 rpm
- Voltages code:

Code	PH	50Hz	60Hz
A6V*	3	200-230/342-415V	220-240/380-480V
A9V*	3	200-230/342-380V	220-240/380-440V
59V	3	200-230/342-380V	-


Optional: 50Hz, 60Hz models are available on request.

* The motor can be used in both 50/60Hz.

Performance Curve, 50Hz

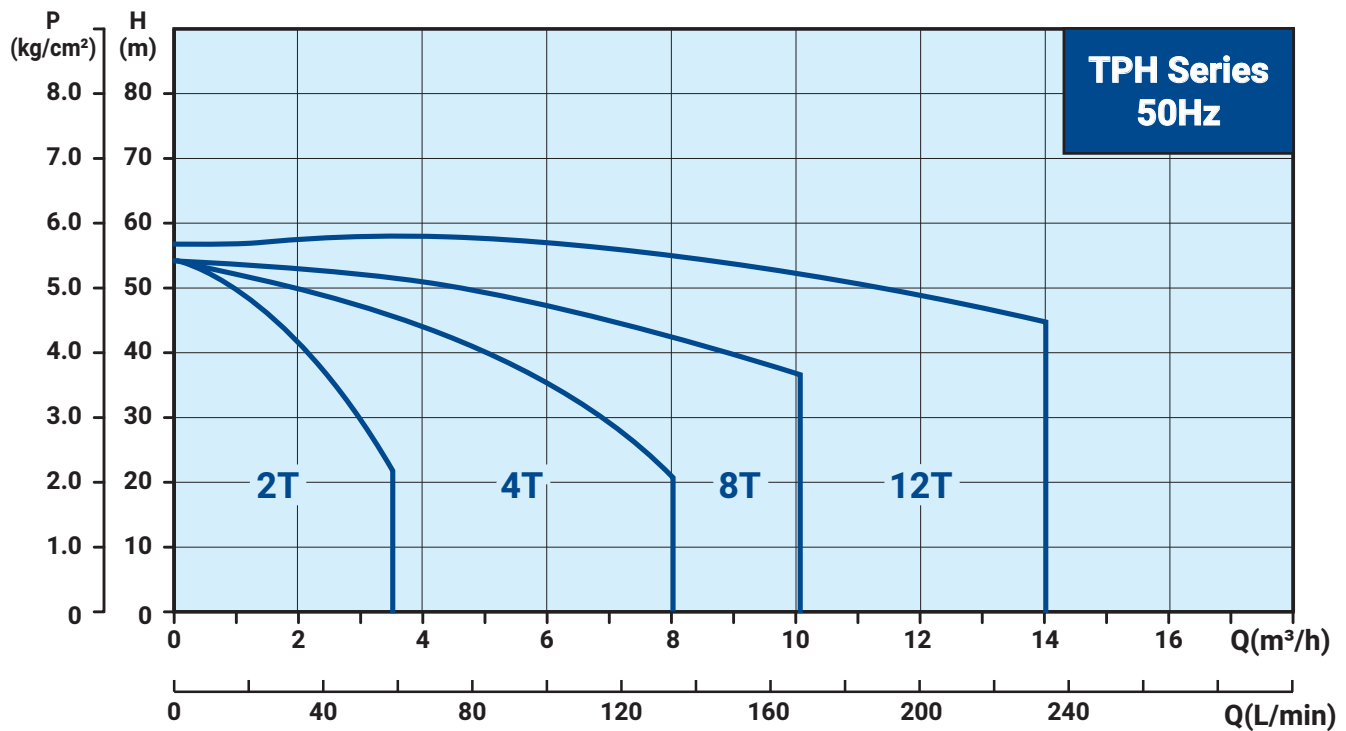


Performance Curve, 60Hz

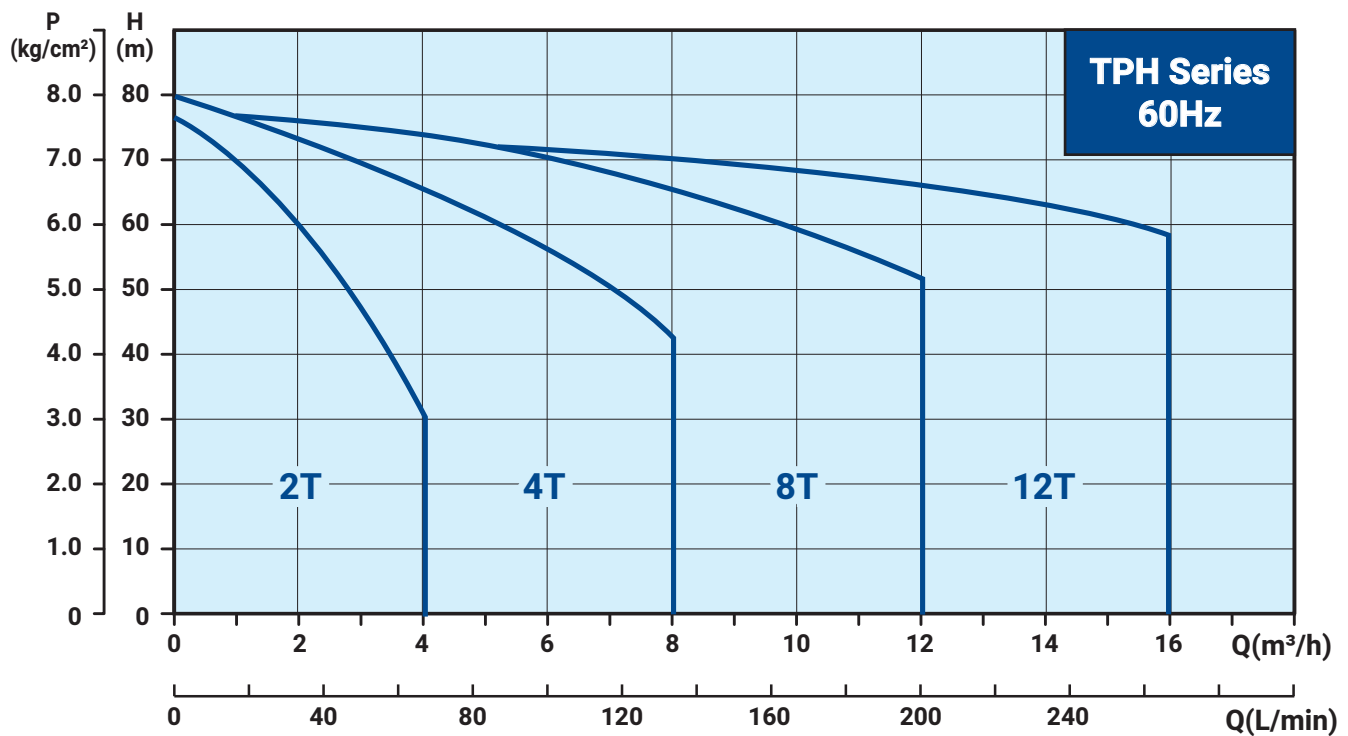


Sectional Drawing

TPH 2/4T

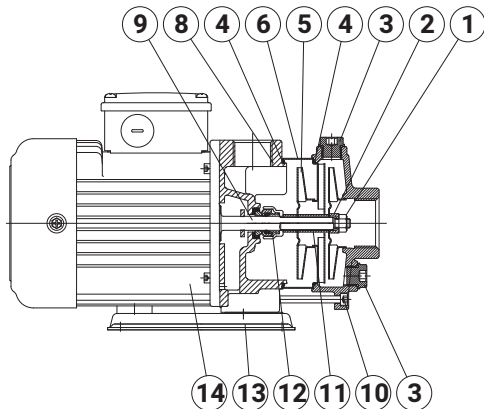

TPH 8/12T

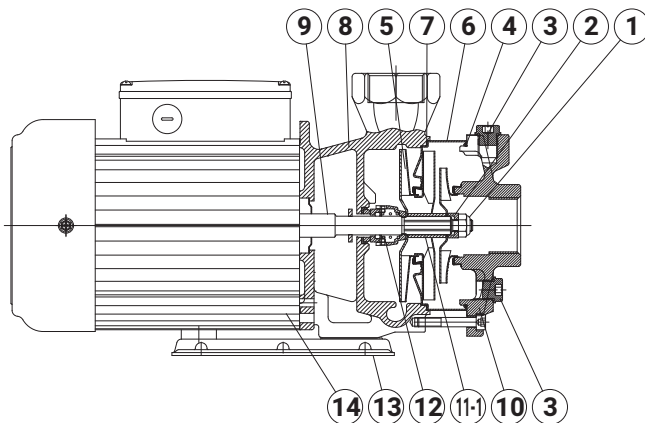

Materials

NO.	Part Name	Material	
		Standard	S series
1	Lock Nut	SUS316	SUS316
2	Sleeve(Shaft End)	SUS316	SUS316
3	Water Plug	SUS304	SUS304
4	O Ring	HNBR	HNBR
5	Impeller	SUS304	SUS304
6	Intermediate Chamber	SUS304	SUS304
7	Gasket	Teflon	Teflon
8	Pump Casing	FC20	SUS304
9	Shaft	SUS304	SUS304
10	Suction Chamber	FC20	SUS304
11	Sleeve	SUS304	SUS304
11-1	Sleeve	SUS316	SUS316
12	Mechanical Seal	MGS (TPH2T/4T) HGS (TPH8T/12T)	
13	Mounted Base	Coating Steel	
14	Motor Shell	Aluminum Alloy	

SUS 304 may be replaced by SUS 316, depending on stock availability.

Options on Request

- Terminal box position adjustable
- Special mechanical seal

TPH 2/4T

Mechanical seal type	Material	
	Stationary Face/ Rotary Face	Cup Gasket & O Ring
MGS	(G)Carbon/ (S)Silicium carbide	(H) HNBR (V) Viton (E) EPDM
MSS	(S)Silicium carbide/ (S)Silicium carbide	


TPH 8/12T

Mechanical seal type	Material	
	Stationary Face/ Rotary Face	Cup Gasket & O Ring
HGS	(G)Carbon/ (S)Silicium carbide	(H) HNBR (V) Viton (E) EPDM
HSS	(S)Silicium carbide/ (S)Silicium carbide	

Electrical Data, 50/60Hz


Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPH 2T1K	3	A3V	50 60	200-240/342-415V 200-255/342-480V	0.37	1.8-2.0/1.1-1.2 1.8-1.7/1.0-1.0	1.1 1.5	2.0-2.1/1.1-1.2 2.3-2.1/1.3-1.2
TPH 2T2K	3	A3V	50 60	200-240/342-415V 200-255/342-480V	0.37	1.8-2.0/1.1-1.2 1.8-1.7/1.0-1.0	1.1 1.5	2.0-2.1/1.1-1.2 2.3-2.1/1.3-1.2
TPH 2T3K	3	A3V	50 60	200-240/342-415V 200-255/342-480V	0.37	1.8-2.0/1.1-1.2 1.8-1.7/1.0-1.0	1.1 1.5	2.0-2.1/1.1-1.2 2.3-2.1/1.3-1.2
TPH 2T4K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	0.55	2.5-2.4/1.5-1.4 2.3-2.2/1.3-1.3	1.1 1.5	2.7-2.6/1.6-1.5 3.2-3.0/1.9-1.6
TPH 2T5K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	0.75	3.5-3.6/2.0-2.2 3.1-3.1/1.8-1.9	1.1 1.4	3.8-3.8/2.2-2.3 4.1-3.9/2.3-2.3
TPH 2T6K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	0.75	3.5-3.6/2.0-2.2 3.1-3.1/1.8-1.9	1.1 1.4	3.8-3.8/2.2-2.3 4.1-3.9/2.3-2.3

Dimensions

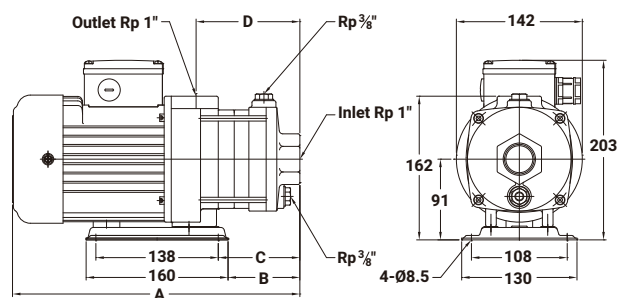


Model	Cycle Hz	A mm	B mm	C mm	D mm	N.W. kg	
TPH 2T1K	50/60	286	63	74	99	10.0	36
TPH 2T2K	50/60	286	63	74	99	10.1	36
TPH 2T3K	50/60	304	81	92	117	10.3	36
TPH 2T4K	50/60	382	99	110	135	12.8	36
TPH 2T5K	50/60	400	117	128	153	13.8	30
TPH 2T6K	50/60	418	135	146	171	14.0	30

Performance Curve, 50Hz

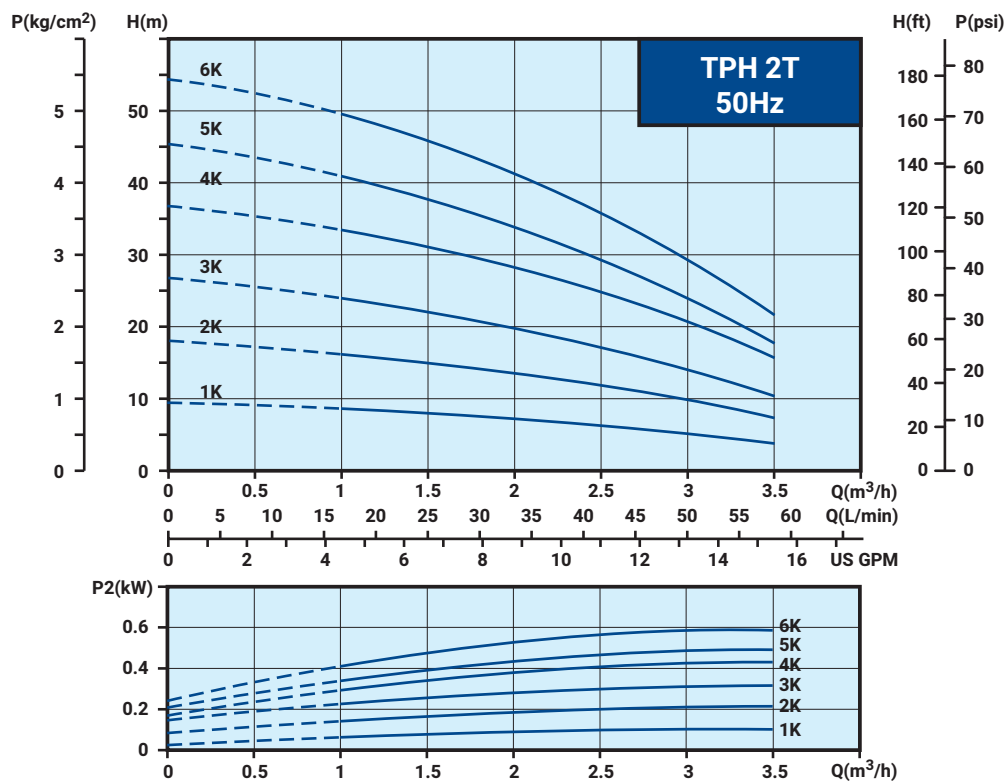


Performance Curve, 60Hz

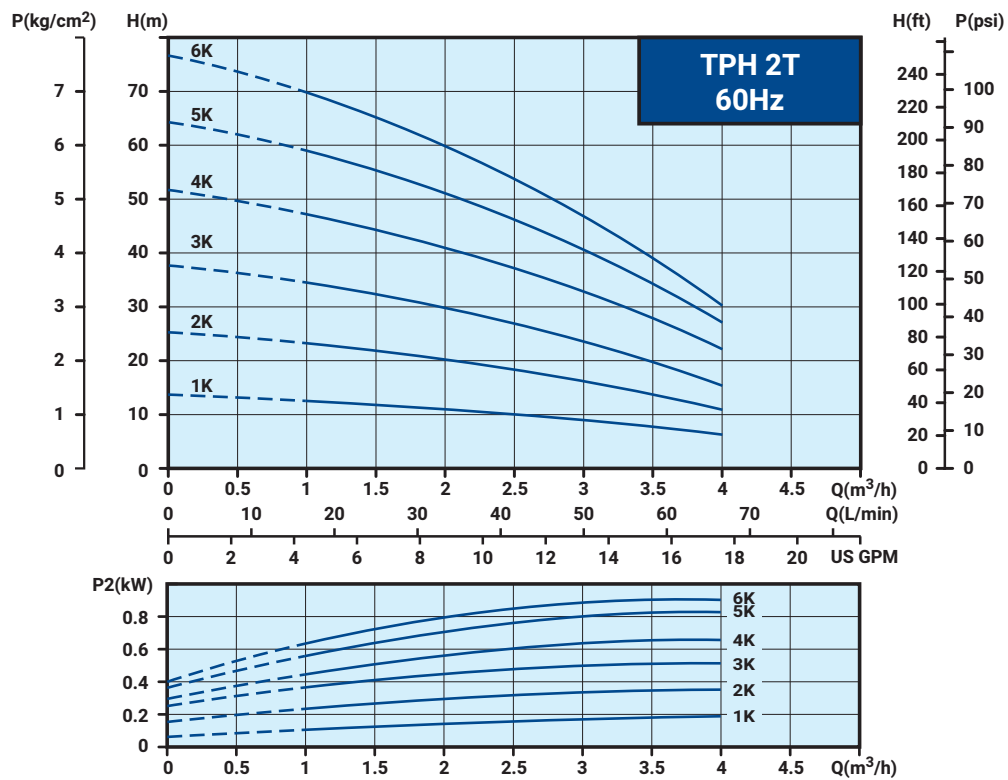

Electrical Data, 50/60Hz


Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPH 4T2K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	0.55	2.5-2.4/1.5-1.4 2.3-2.2/1.3-1.3	1.1 1.5	2.7-2.6/1.6-1.5 3.2-3.0/1.9-1.6
TPH 4T3K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	0.75	3.5-3.6/2.0-2.2 3.1-3.1/1.8-1.9	1.1 1.4	3.8-3.8/2.2-2.3 4.1-3.9/2.3-2.3
TPH 4T4K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	1.1	5.2-5.4/3.1-3.4 4.6-4.6/2.8-3.1	1.1 1.4	5.5-5.7/3.3-3.5 6.2-5.7/3.6-3.5
TPH 4T5K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	1.5	6.7-6.7/3.8-4.0 6.0-5.9/3.5-3.6	1.1 1.4	7.3-7.1/4.1-4.2 8.1-7.6/4.7-4.2
TPH 4T6K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	1.5	6.7-6.7/3.8-4.0 6.0-5.9/3.5-3.6	1.1 1.4	7.3-7.1/4.1-4.2 8.1-7.6/4.7-4.2

Dimensions

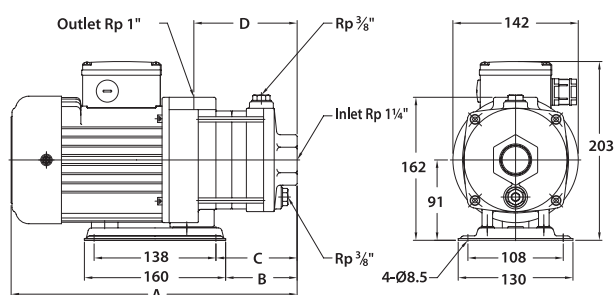


Model	Cycle Hz	A mm	B mm	C mm	D mm	N.W. kg	
TPH 4T2K	50/60	355	72	83	108	12.7	30
TPH 4T3K	50/60	382	99	110	135	13.8	30
TPH 4T4K	50/60	439	126	137	162	16.6	30
TPH 4T5K	50/60	491	153	164	189	18.0	24
TPH 4T6K	50/60	519	180	191	216	18.4	24

Performance Curve, 50Hz

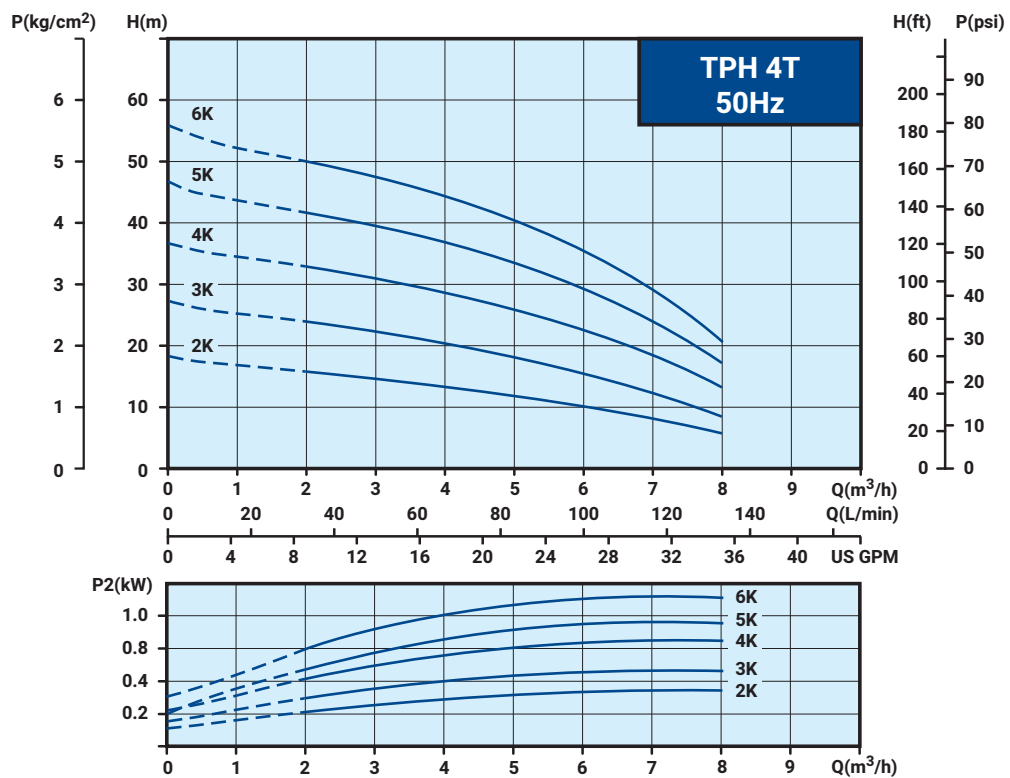


Performance Curve, 60Hz

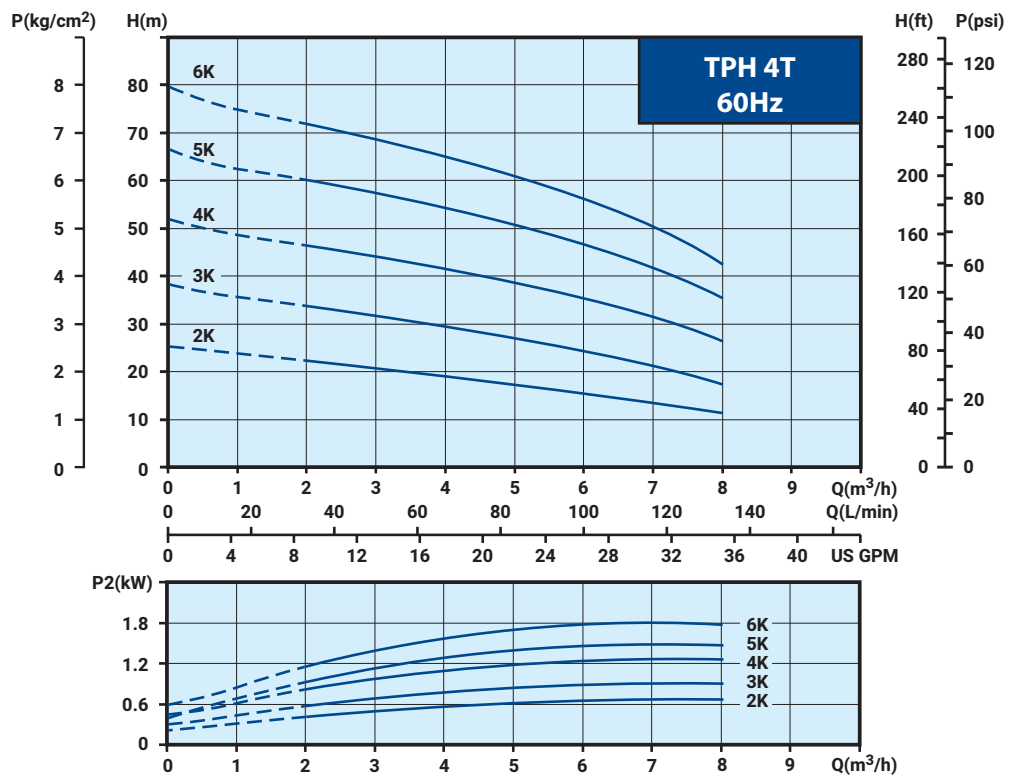

Electrical Data, 50/60Hz


Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPH 8T2K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	0.75	3.5-3.6/2.0-2.2 3.1-3.1/1.8-1.9	1.1 1.4	3.8-3.8/2.2-2.3 4.1-3.9/2.3-2.3
TPH 8T2.5K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	1.1	5.2-5.4/3.1-3.4 4.6-4.6/2.8-3.1	1.1 1.4	5.5-5.7/3.3-3.5 6.2-5.7/3.6-3.5
TPH 8T3K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	1.5	6.7-6.7/3.8-4.0 6.0-5.9/3.5-3.6	1.1 1.4	7.3-7.1/4.1-4.2 8.1-7.6/4.7-4.2
TPH 8T4K	3	A9V	50 60	200-230/342-380V 220-240/380-440V	2.2	9.5-10.5/5.5-5.6 8.6-8.4/4.9-5.0	1.1 1.5	10.2-10.9/5.9-5.9 12.1-11.2/6.9-6.4
TPH 8T5K	3	A9V	50 60	200-230/342-380V 220-240/380-440V	2.2	9.5-10.5/5.5-5.6 8.6-8.4/4.9-5.0	1.1 1.5	10.2-10.9/5.9-5.9 12.1-11.2/6.9-6.4
TPH 8T6K	3	A9V	50 60	200-230/342-380V 220-240/380-440V	3.0	12.2-13.1/7.1-7.1 11.2-10.7/6.4-6.3	1.1 1.3	13.4-14.0/7.9-7.8 14.5-13.3/8.3-7.6

Dimensions

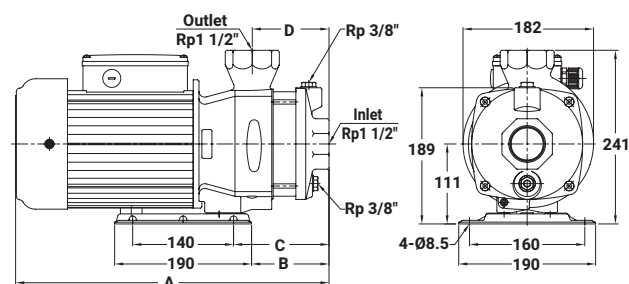


Model	Cycle Hz	A mm	B mm	C mm	D mm	N.W. kg	
TPH 8T2K	50/60	377	77	101	75	19.6	24
TPH 8T2.5 K	50/60	439	108	133	107	22.7	24
TPH 8T3K	50/60	464	108	133	107	24.8	24
TPH 8T4K	50/60	457	108	133	107	30.2	24
TPH 8T5K	50/60	491	142	167	141	30.8	15
TPH 8T6K	50/60	516	142	167	141	34.2	15

Performance Curve, 50Hz

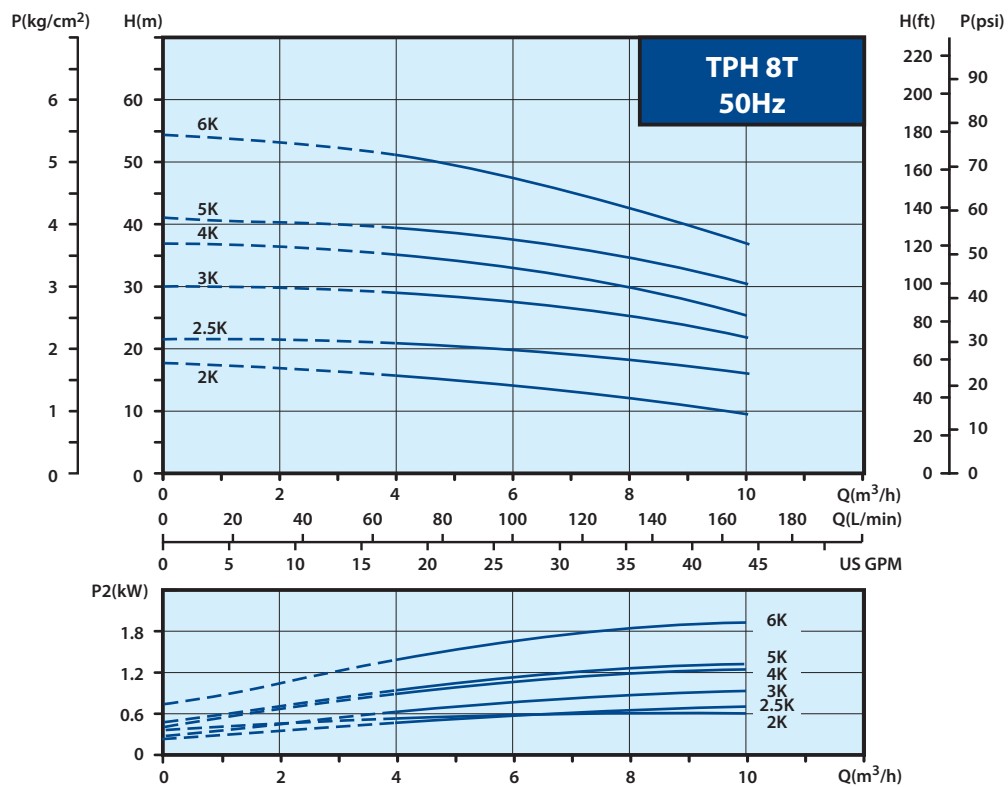


Performance Curve, 60Hz

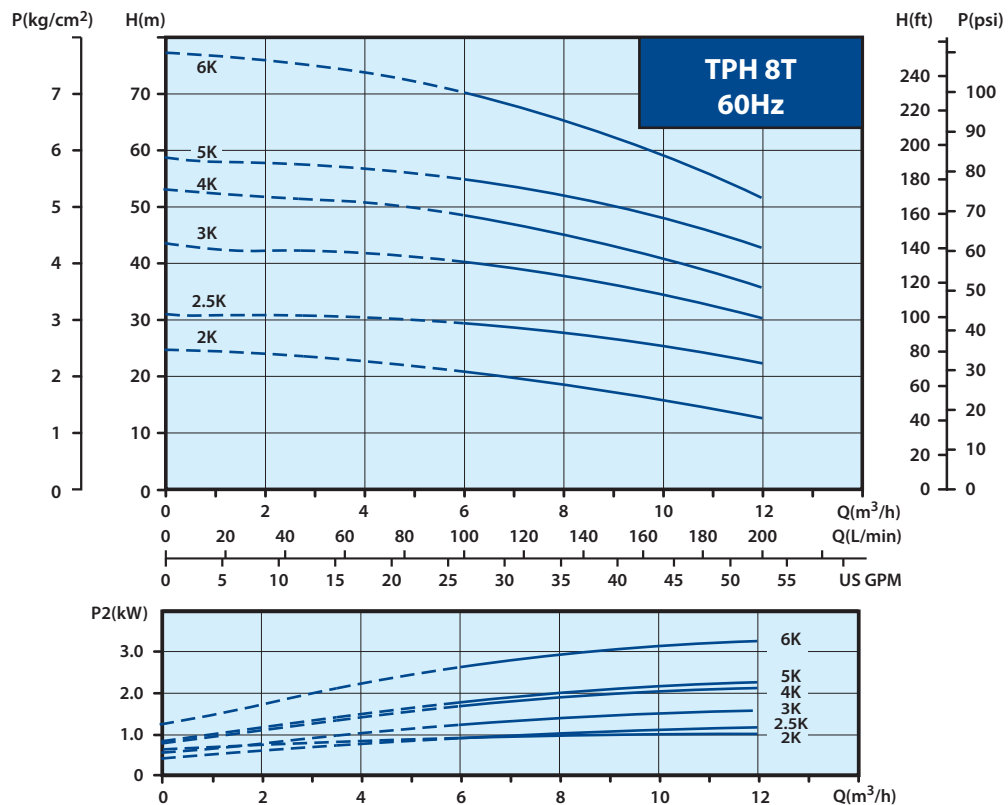

Electrical Data, 50/60Hz


Model	PH Ø	Voltage code	Cycle Hz	Volts V	Output kW	Ampere I _{1/1} (A)	Service Factor	Ampere I _{max} (A)
TPH 12T1K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	0.55	2.5-2.4/1.5-1.4 2.3-2.2/1.3-1.3	1.1 1.5	2.7-2.6/1.6-1.5 3.2-3.0/1.9-1.6
TPH 12T2K	3	A6V	50 60	200-230/342-415V 220-240/380-480V	1.5	6.7-6.7/3.8-4.0 6.0-5.9/3.5-3.6	1.1 1.4	7.3-7.1/4.1-4.2 8.1-7.6/4.7-4.2
TPH 12T3K	3	A9V	50 60	200-230/342-380V 220-240/380-440V	2.2	9.5-10.5/5.5-5.6 8.6-8.4/4.9-5.0	1.1 1.5	10.2-10.9/5.9-5.9 12.1-11.2/6.9-6.4
TPH 12T4K	3	A9V	50 60	200-230/342-380V 220-240/380-440V	3.0	12.2-13.1/7.1-7.1 11.2-10.7/6.4-6.3	1.1 1.3	13.4-14.0/7.9-7.8 14.5-13.3/8.3-7.6
TPH 12T5K	3	A9V	50 60	200-230/342-380V 220-240/380-440V	3.4 3.7	13.4-13.0/7.8-7.4 13.4-12.6/7.7-7.0	1.1 1.25	14.6-13.9/8.5-8.0 16.4-15.1/9.4-8.4
TPH 12T6K	3	59V	50	200-230/342-380V	3.4	13.4-13.0/7.8-7.4	1.1	14.6-13.9/8.5-8.0

Dimensions

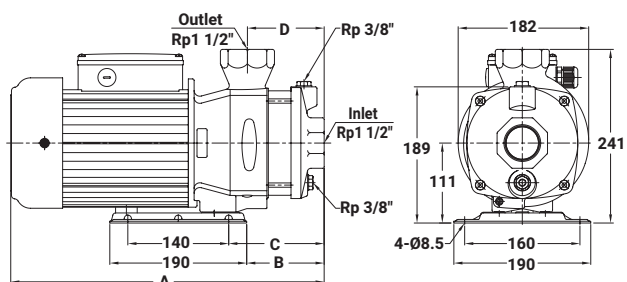


Model	Cycle Hz	A mm	B mm	C mm	D mm	N.W. kg	
TPH 12T1K	50/60	377	76	101	75	18.8	24
TPH 12T2K	50/60	432	76	101	75	24.1	24
TPH 12T3K	50/60	457	108	133	107	30.0	24
TPH 12T4K	50/60	482	108	133	107	33.2	24
TPH 12T5K	50/60	536	142	167	141	36.3	15
TPH 12T6K	50	536	142	167	141	36.5	15

Performance Curve, 50Hz

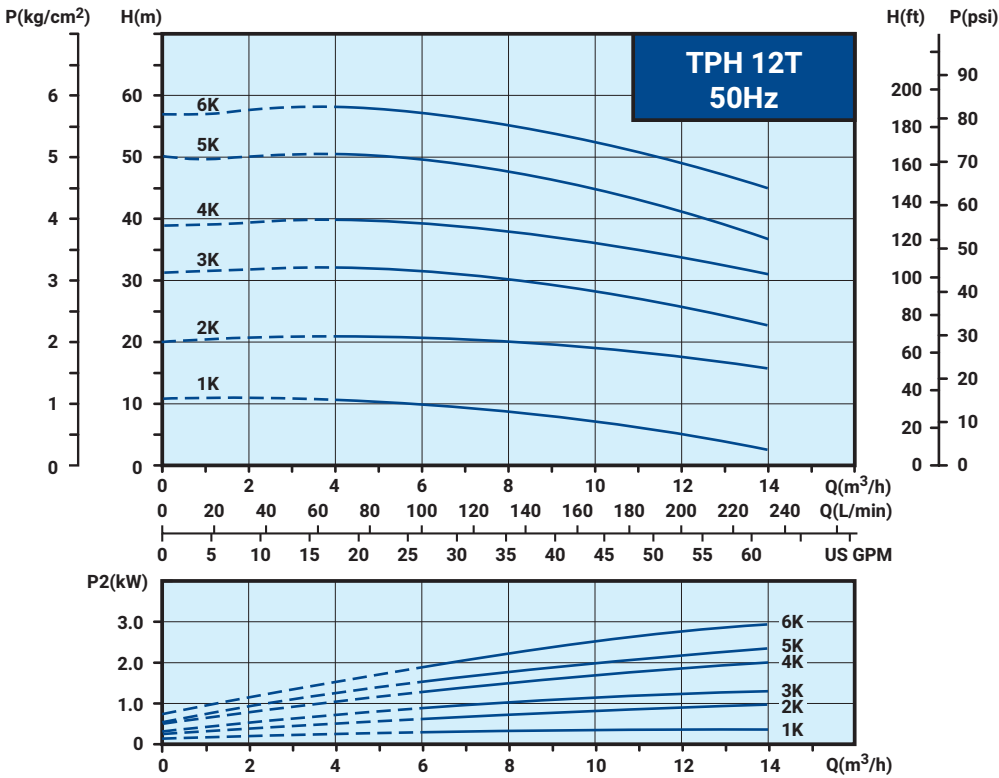

Performance Curve, 60Hz

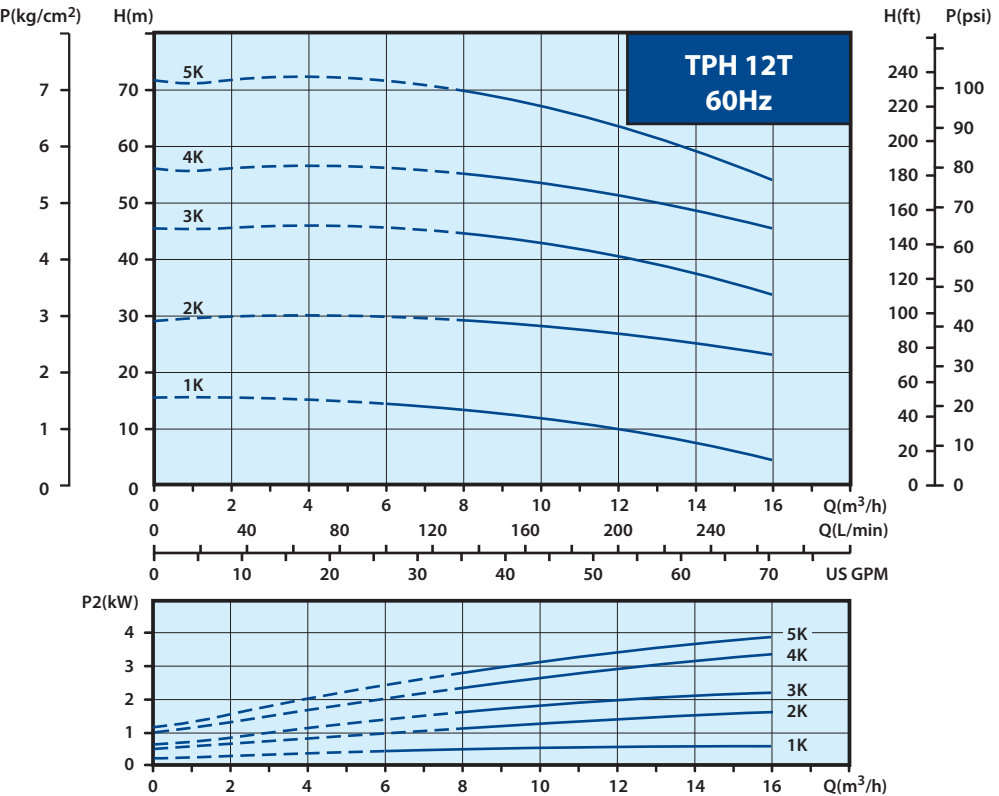

Memo

Memo





WALRUS
PUMP

WALRUS PUMP CO., LTD.

Head office: No.83-14, Dapiantou, Sanzhi Dist.,

New Taipei City 252, Taiwan

Tel: (+886) 2 2636-1123~7

Fax: (+886) 2 8635-2660

Email : walrus.sales@walrus.com.tw



All specifications are subject to change without notice. TPH-IE3-EN001-202309

