


# M/C 四面立柱

- 熱處理(標準化)
- 適用於各種臥式電腦加工機台
- 材質:高精密FCD 50石墨鑄鐵 / 鋁合金A356



## 特點

標準化定位孔設計，供快速定位使用

## 選購配件T孔尺寸



(選購配件詳細請參考第 44 頁)

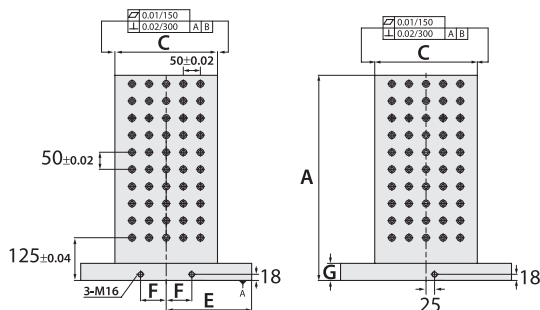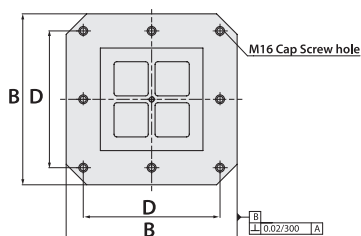

## 規格表 (材質:高精密FCD 50石墨鑄鐵 / 鋁合金 A356)

單位: mm

型號	A	B	C	D	E	F	G	T	定位孔	安裝孔	重量 (kg)		
											FCD50	A356	
HSH-300300-0500-12	500	300	150	250	150	40	50	Ø12	M12	64	4	90	—
HSH-400400-0500-12	500	400	250	320	200	55	50	Ø12	M12	128	4	155	54
HSH-400400-0650-12	650	400	250	320	200	55	50	Ø12	M12	176	4	200	73
HSH-500500-0600-12	600	500	300	400	250	75	50	Ø12	M12	200	8	240	88
HSH-500500-0750-12	750	500	300	400	250	75	50	Ø12	M12	250	8	300	122
HSH-630630-0700-12	700	630	350	500	315	100	50	Ø12	M12	288	8	360	125
HSH-630630-0850-12	850	630	350	500	315	100	50	Ø12	M12	360	8	445	180
HSH-800800-0800-12	800	800	500	640	400	135	50	Ø12	M12	504	8	635	204
HSH-800800-1000-12	1000	800	500	640	400	135	50	Ø12	M12	648	8	780	312
HSH-10001000-1000-12	1000	1000	600	800	500	165	55	Ø12	M12	792	8	1164	—
HSH-10001000-1250-12	1250	1000	600	800	500	165	55	Ø12	M12	1012	8	1391	—
HSH-300300-0500-16	500	300	150	250	150	40	50	Ø16	M16	64	4	90	—
HSH-400400-0500-16	500	400	250	320	200	55	50	Ø16	M16	128	4	152	54
HSH-400400-0650-16	650	400	250	320	200	55	50	Ø16	M16	176	4	195	73
HSH-500500-0600-16	600	500	300	400	250	75	50	Ø16	M16	200	8	235	88
HSH-500500-0750-16	750	500	300	400	250	75	50	Ø16	M16	250	8	295	122
HSH-630630-0700-16	700	630	350	500	315	100	50	Ø16	M16	288	8	365	123
HSH-630630-0850-16	850	630	350	500	315	100	50	Ø16	M16	360	8	440	180
HSH-800800-0800-16	800	800	500	640	400	135	50	Ø16	M16	504	8	630	201
HSH-800800-1000-16	1000	800	500	640	400	135	50	Ø16	M16	648	8	770	312
HSH-10001000-1000-16	1000	1000	600	800	500	165	55	Ø16	M16	792	8	1164	—
HSH-10001000-1250-16	1250	1000	600	800	500	165	55	Ø16	M16	1012	8	1391	—

可接受特殊規格訂做，歡迎洽詢！