

FIG-1



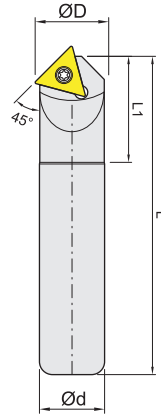


FIG-2

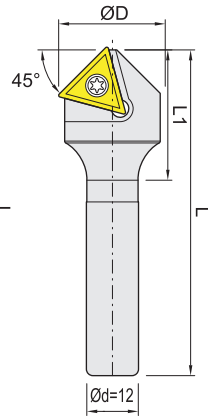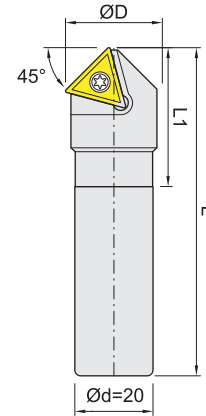

功能：銑床與加工中心機  
用於雕刻、銑槽、倒角與中心孔

Application: Engraving, grooving, chamfering and spotting.

FIG-1 Item code	Dimensions,mm				Teeth	Insert	Screw	Wrench	Weight Kg
	D	d	L	L1					
<b>TCRM90-20-S20-130</b>	21.5	20	130	35	1	TCMX16T308CR	MS4011A	ETF15	0.32

FIG-2 Item code	Dimensions,mm				Teeth	Insert	Screw	Wrench	Weight Kg
	D	d	L	L1					
<b>C12-TCR90-22-120</b> (*1)	25	12	120	30	1	TC..16T3..	MS4011A	ETF15	0.16
<b>C20-TCR90-22-120</b> (*2)	25	20	120	35	1				0.31

\*1 適用於鑽床 Applicable to drilling machine  
\*2 適用於銑床 Applicable to milling machine

被切削材 Workpiece material	Steel 鋼				●	●	●	●				
	Stainless steel 不銹鋼								●	●	●	●
	Cast iron 鑄鐵								●	●	●	
	Non-ferrous metal 非鐵金屬								●			

Insert Shape	Description	GRADE 材質				Dimensions,mm			
		Coated 塗層				Ic	S	Re	d1
		DW143	DW145	GQ17	GM37				
	<b>TCMX16T308CR</b>	●	●	●		9.525	3.97	0.8	4.4
	<b>TCGT16T304EN</b>				●	9.525	3.97	0.4	4.4